

IAS Classic Security Target Public version IAS Classic V5.0 with MOC Server V3.0 on MultiApp V4.2 Common Criteria / ISO 15408 EAL 5+

August 31st, 2020



#### CONTENT

1.	SEC	URITYTARGET INTRODUCTION	4
	1.1	SECURITY TARGET LITE REFERENCE	4
	1.2	TOE REFERENCE	
	1.3	TOE IDENTIFICATION	
	1.3.1		
	1.3.2		
	1.4	SECURITY TARGET OVERVIEW	7
	1.5	References	
	1.5.1		
	1.5.2	2 Internal References	
	1.6	ACRONYMS AND GLOSSARY	
2.	TOF	E OVERVIEW	12
	2.1	TOE DESCRIPTION	12
	2.1	TOE BOUNDARIES	
	2.2	TOE BOONDAKES	
	2.3		
	2.3.1		
	2.3.3		
3.		VFORMANCE CLAIMS	
5.			
		CC CONFORMANCE CLAIM	
	3.2	PP CLAIM	
	3.3	PACKAGE CLAIM	
4.	SEC	URITY PROBLEM DEFINITION	
	4.1	GENERAL	
	4.2	THREATS	19
	4.3	ORGANIZATIONAL SECURITY POLICIES	
	4.4	Assumptions	
	4.5	JUSTIFICATIONS FOR ADDING ASSUMPTIONS ON THE ENVIRONMENT	
	4.:	5.1.1 Additions to [PP-SSCD-KG]	21
5.	SEC	URITY OBJECTIVES	
	5.1	GENERALS	
	5.2	SECURITY OBJECTIVES FOR THE TOE	
	5.2.1		
	5.2.2		
	5.2.3		
	5.2.4	Part 4 specific (additional security objectives related to part 2)	
	5.2.5		
	5.2.6		
	5.3	SECURITY OBJECTIVES FOR THE OPERATIONAL ENVIRONMENT	
	5.3.1	•••••••••	
	5.3.2	2 Part 3 specific	25
	5.3.3	I = J = J	
	5.3.4	<i>Part 5 and part 6 extension (additional security objectives related to part 2 &amp; part 3)</i>	
	5.3.5	5 From Platform	
	5.4	SECURITY OBJECTIVE RATIONALE	
	5.4.1		
	5.4.2		
	5.4.3	1	
	5.4.4	- T J J J J J J J J J J J J J J J J J J	
		4.4.1 Compatibility between objectives for the TOE	
	5.4.5	4.4.2       Compatibility between objectives for the environment	
		4.5.1 Additions to [PP-SSCD-KG]	
		4.5.1 Additions to [PP-SSCD-KO]	
		4.5.3 Substitution	
6.		TENDED COMPONENTS DEFINITION	



		FINITION OF THE FAMILY FPT_EMS	
	6.2 De	FINITION OF THE FAMILY FIA_API	
7.	SECUR	RITY REQUIREMENTS	
	7.1 SEG	CURITY FUNCTIONAL REQUIREMENTS FOR THE TOE	
	7.1.1	Class Cryptographic Support (FCS)	
	7.1.2	Class FDP User Data Protection	
	7.1.3	Class FIA Identification and Authentication	
	7.1.4	Class FMT Security Management	
	7.1.5	Class FPT Protection of the Security Functions	
	7.1.6	Class FTP Trusted Path/Channel	
	7.2 Sec	CURITY ASSURANCE REQUIREMENTS FOR THE TOE	
	7.3 Sec	CURITY REQUIREMENTS RATIONALE	
	7.3.1	SFR and PP	
	7.3.2	Security Functional Requirements Rationale	
	7.3.2.1		
	7.3.2.2	2 Dependency Rationale	
	7.3.3	Security Assurance Requirements Rationale	
8.	TOE SU	UMMARY SPECIFICATION	
	8.1 TO	DE SECURITY FUNCTIONS	
	8.1.1	SF provided by IAS Application	
	8.1.2	TSFs provided by the platform	

### FIGURES

Figure 1: TOE Boundaries	13
Figure 2: TOE Personalization	15
Figure 3: TOE Operational Use	16

#### TABLES

Table 1: Identification of the actors	14
Table 2: Threats, Assumptions, and Policies vs. Security objectives	28
Table 3: Compatibility with platform Security objectives	
Table 4: Compatibility with platform PACE Security objectives	36
Table 5: FCS_CKM.1/SCD iteration explanation	39
Table 6: FCS_CKM.1/Session iteration explanation	39
Table 7: FCS CKM.4 iteration explanation	40
Table 8: FCS_CKM.4/Session iteration explanation         Table 9: FCS_COP.1/DSC iteration explanation	40
Table 9: FCS_COP.1/DSC iteration explanation	41
Table 10: FCS_COP.1/Session 'Other operations' iteration explanation	41
Table 11: Subjects and security attributes for access control	42
Table 12: FIA_AFL.1/PERSO refinements	47
Table 13: conditions triggering tests	53
Table 14: PP vs. SFR rationale	56
Table 15: Objective vs. SFR rationale	57
Table 15: Objective vs. SFR rationale         Table 16: Dependency rationale	61
Table 19: TOE security functions list	62
Table 20: Security Functions provided by the MultiApp V4.2 Platform	63





## 1. SECURITY TARGET INTRODUCTION

## 1.1 SECURITY TARGET LITE REFERENCE

Title :	MultiApp V4.2: IAS EN Core & Extensions Security Target
Version :	1.7p
ST Reference :	D1491739
IT Security Evaluation	Serma Safety and Security
scheme :	
IT Security	Agence Nationale de la Sécurité des Systèmes d'Information (ANSSI)
Certification scheme :	

## **1.2 TOE** REFERENCE

Product Name :	MultiApp V4.2
Product Commercial Names:	IAS Classic V5.0 on MultiApp V4.2
Security Controllers :	IFX_CCI_000010h
TOE Name :	IAS Classic V5.0 with MOC Server V3.0 on MultiApp V4.2
TOE Version :	IAS version 5.0.0.A.C / MOC Server 3.0.1A
TOE documentation :	Guidance [AGD]
Composition elements:	
Platform Identifier:	MultiApp V4.2 Platform
Platform Version:	4.2

### **1.3 TOE IDENTIFICATION**

#### 1.3.1 IAS Classic v5.0

The TOE identification is provided by the Card Production Life Cycle Data (CPLC Data) of the TOE. These data are available by executing a dedicated command.

The TOE identification is provided by a dedicated command GET CARD DATA with the next TAG:

	P1	P2
CPLC data	'9F'	'7F'
Software version	'7F'	'30'
Applet version	'DF'	'30'

Please refer to TOE documentation for more details.

The response of the GET CARD DATA is described below. In yellow the field of the TOE identification





#### With TAG "7F30": Software version (Applet Label + Applet version)

When requiring the software version (P1P2='7F30') the applet returns, embedded in a BERTLV '7F30', 'C0' and 'C1' as described in next table:

Tag	Length	Value	Subject Value	
'C0'	'0E'	"IAS Classic v5"	Applet label	"IAS Classic v5" (ascii) Or '49:41:53:20:43:6C:61:73:73:69:63:20:76:35' (hexa)
'C1'	'09'	"5.0.0.A.C"	Applet version	IAS ClassicV5.0 on MultiAppV4.2 "5.0.0.A.C" (ascii) or '35:2E:30:2E:41:2E:43' (hexa)

#### With TAG "DF30": Applet version (identical to Applet version with tag "7F30")

When requiring the applet version (P1P2='DF30') the applet returns the applet version embedded in a BERTLV 'DF30':

Value	Subject	Value
"5.0.0.A.C"	Applet version	5.0.0.A.C 'DF3009352E302E302E412E43'

#### With TAG "9F7F"

When requiring the CPLC data (P1P2='9F7F'), the applet returns the following data:

DTHR data		
Tag	Length	Subject
'9F7F' '2A' CPLC Data is defined in below		CPLC Data is defined in below

Name	Length in bytes	Value
IC fabricator	2	4090h
IC type	2	3401h
Operating system identifier	2	1981h
Operating system release date	2	9218h
Operating system release level	2	0402h
IC fabrication date	2	
IC serial number	4	
IC batch ID	2	
IC module fabricator	2	
IC module packaging data	2	
ICC manufacturer	2	
IC embedding date	2	
IC pre-personalizer	2	
IC pre-personalization date	2	
IC pre-personalization equipment ID	4	
IC personalizer	2	
IC personalization date	2	
IC personalization equipment ID	4	



#### 1.3.2 MOC Server v3.0

The MOC Server v3.0 identification is provided by a dedicated command GET VERSION with the following format:

Field	Value
CLA	00h
INS	5Ah
P1	00h
P2	00h
Le	1Eh

The response of the GET VERSION is described below:

Field	Value
Data	Identification of MOC Server is detailed in the below
SW1-SW2	Status Bytes

The data are structured with two BER coded data objects as follow:

- Tag 'A0' contains the product reference.
- Tag 'A1' contains the product version.

Details are given in the table below:

Tag	Length	Value	Detail					
A0h	0Fh	"MOCA SERVER 3.0"	Applet label					
A1h	06h	"3.0.1A"	Applet version with 3: Major 0: minor 1: sub version A: release					

The TOE and the product differ, as further explained in §2 TOE boundaries:

- The TOE is the IAS application, with MOC server, on the JCS open platform MultiApp V4.2
- The MultiApp V4.2 product also includes other applets (see section 2.2).



## **1.4 SECURITY TARGET OVERVIEW**

The Target of Evaluation (TOE) is composed of the MultiApp V4.2 platform and the electronic signature application IAS Classic V5.0 with MOC Server V3.0

The platform includes the hardware and the operating system.

The IC is evaluated in conformance with [PP-IC-0084].

The Platform is evaluated in conformance with [PP-JCS-Open].

The IAS application is evaluated in conformance with [PP-SSCD-KG TCCGA TCSCA] and [PP-SSCD-KI TCSCA],

The main objectives of this ST are:

- To introduce TOE and the IAS application,
- To define the scope of the TOE and its security features,
- To describe the security environment of the TOE, including the assets to be protected and the threats to be countered by the TOE and its environment during the product development, production and usage.
- To describe the security objectives of the TOE and its environment supporting in terms of integrity and confidentiality of application data and programs and of protection of the TOE.
- To specify the security requirements which includes the TOE security functional requirements, the TOE assurance requirements and TOE security functions.



## 1.5 REFERENCES

## 1.5.1 External References

[CC]	Common Criteria references								
[CC-1]	Common Criteria for Information Technology Security Evaluation Part 1: Introduction and general model, CCMB-2017-04-001, version 3.1 rev 5, April 2017								
[CC-2]	Common Criteria for Information Technology Security Evaluation Part 2: Security functional components, CCMB-2017-04-002, version 3.1 rev 5, April 2017								
[CC-3]	Common Criteria for Information Technology Security Evaluation Part 3: Security assurance components, CCMB-2012-04-003, version 3.1 rev 5, April 2017								
[CEM]	Common Methodology for Information Technology Security Evaluation Evaluation Methodology CCMB-2017-04-004, version 3.1 rev 5, April 2017								
[Infineon]	Infineon references								
[IFX-IC)	[IFX-IC-CCI]								
[IFX-IC-CCI]	Public Security Target Common Criteria v3.1 – EAL6 augmented / EAL6+ IFX_CCI_00000Fh IFX_CCI_000026h IFX_CCI_000027h IFX_CCI_000027h IFX_CCI_000028h IFX_CCI_000028h IFX_CCI_00002Ah IFX_CCI_00002Bh IFX_CCI_00002Ch G12 Resistance to attackers with HIGH attack potential Revision: 1.1 2018-11-20								
[CR-IC]	[CR-IC-CCI]								
[CR-IC-CCI]	Certification Report BSI-DSZ-CC-1079-2018 for IFX_CCI_00002Fh, IFX_CCI_000010h, IFX_CCI_000026h, IFX_CCI_00002Fh, IFX_CCI_000028h, IFX_CCI_000029h, IFX_CCI_00002Ah, IFX_CCI_00002Bh, IFX_CCI_00002Ch in the design step G12 and including optional software libraries and dedicated firmware from Infineon Technologies AG Certification Report V1.0 CC-Zert-327 V5.21 26/09/2018 Maintenance Continuity Maintenance Report: BSI-DSZ-CC-1079-2018-MA-01 Infineon Security Controller IFX_CCI_00000Fh, IFX_CCI_000010h, IFX_CCI_000026h, IFX_CCI_000027h, IFX_CCI_000028h, IFX_CCI_000029h, IFX_CCI_00002Ah, IFX_CCI_00002Bh, IFX_CCI_00002Ch in the design step G12 and including optional software libraries and dedicated firmware from Infineon Technologies AG Maintenance Report V1.0 CC-MA-502_V3.11 3/12/2018								



[ICAO-TR-SAC]	Technical Guideline – TR-03110-1, Advanced Security Mechanisms for Machine Readable Travel Documents and eIDAS Token, Part 1 – eMRTDs with BAC/PACEv2 and EACv1, Version 2.20, 26.02.2015								
[ISO]	ISO references								
[ISO7816]	ISO 7816, Identification cards – Integrated circuit(s) cards with contacts, Part 4: Organization, security and commands for interchange, FDIS2004								
[ISO9796-2]	ISO/IEC 9796-2:2010: Information technology – Security techniques – Digital Signature Schemes giving message recovery – Part 2: Integer factorization based mechanisms, Third edition 2010-12-15								
[ISO9797-1]	ISO/IEC 9797-1:2011: Information technology – Security techniques – Message Authentication Codes (MACs) – Part 1: Mechanisms using a block cipher, Second edition 2011-03-01								
[PKCS#3]	PKCS #3: Diffie-Hellman Key-Agreement Standard, An RSA Laboratories Technical Note, Version 1.4, Revised November 1, 1993								
[PP]	Protection profiles								
[PP-SSCD]	[EN-419211] supersedes former EN 14169								
[PP-SSCD-KG]	[EN-419211-2]								
[PP-SSCD-KI]	[EN-419211-3]								
[EN-419211]	Protection profiles for secure signature creation device – EN version								
[PP-SSCD-KG TCCGA TCSCA]	[EN-419211-2] & [EN-419211-4] & [EN-419211-5]								
[PP-SSCD-KI TCSCA]	[EN-419211-3] & [EN-419211-6]								
[EN-419211-2]	Protection profiles for secure signature creation device – Part2 : Device with key generation BSI-CC-PP-0059-2009-MA-02, 30 June 2016								
[EN-419211-3]	Protection profiles for secure signature creation device – Part3: Device with key import BSI-CC-PP-0075-2012-MA-01, 30 June 2016								
[EN-419211-4]	Protection profiles for secure signature creation device – Part4: Extension for device with key generation and trusted communication with certificate generation application BSI-CC-PP-0071-2012-MA-01, 30 June 2016								
[EN-419211-5]	Protection profiles for secure signature creation device – Part5: Extension for device with key generation and trusted communication with signature-creation application BSI-CC-PP-0072-2012-MA-01, 30 June 2016								
[EN-419211-6]	Protection profiles for secure signature creation device – Part6: Extension for device with key import and trusted communication with signature-creation application BSI-CC-PP-0076-2013-MA-01, 30 June 2016								
[PP-JCS-Open]	Java Card System Protection Profile – Open Configuration ANSSI-PP-2010-03/M01, Version 3.0, 18 May 2012								
[PP-IC-0084]	Security IC Platform Protection Profile with augmentation Packages- BSI-CC-PP-0084-2014								
[Regulation]	European regulation								
[RegulationEU]	REGULATION N° 910/2014 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 23 <sup>rd</sup> July 2014 on electronic identification and trust services for electronic transactions in the internal market and repealing Directive 1999/93/EC								



## 1.5.2 Internal References

[ASE]	TOE Security Target								
[ST-PLTF]	D1487827 MultiApp V42: JCS Security Target								
[AGD]	TOE Guidance documentation								
[AGD-USR]	IAS Classic V5.0 Reference Manual								
	Ref. D1496252C, February 25 <sup>th</sup> 2020								
[AGD-USR-BIO]	BioPIN Manager V3.0 Reference Manual								
	Ref. D1481720B, March 6 <sup>th</sup> , 2020								
[AGD-OPE-PRE]	MultiApp V4.2: AGD OPE and PRE document - IAS v5.0								
	Ref. D1495976, Rev 1.4, 06/03/2020								
[AGD-VERIF]	D1495102, Verification process of Gemalto non sensitive applet								
	Rev. 1.1, October 2019								
	D1495103, Verification process of Third Party non sensitive applet								
	Rev. 1.1, October 2019								
[AGD-GD-DEV]	D1495101, Guidance for secure application development on Multiapp platforms,								
	Rev. 1.2, December 2019								
	D1495100, Rules for applications on Multiapp certified product								
	Rev. 1.2, November 2019								
	Cord Demonstration Constitution requirement for CCCD ecourity evolution IAC								
[AGD-PERSPEC]	Card Personalization Specification requirement for SSCD security evaluation IAS Classic v5.0								
	Ref. IACv50_001_CPS_Req_For_CC_Evaluation								
	Rev 1.1								
[AGD-COMP]	TOE Guidance documentation – Composition								
[AGD-COMP-USR]	MultiApp ID 4.2 Premium Operating System –Reference Manual, D1493575B February 12 <sup>th</sup> 2020								

ST Lite



## **1.6 ACRONYMS AND GLOSSARY**

Acr.	Term	Definition									
	Forgery	Fraudulent alteration of any part of the genuine document, e.g. changes to the biographical data or the portrait. [SS]									
	IC Dedicated Support Software	That part of the IC Dedicated Software (refer to above) which provides functions after TOE Delivery. The usage of parts of the IC Dedicated Software might be restricted to certain phases.									
	IC Dedicated Test Software	That part of the IC Dedicated Software (refer to above) which is used to test the TOE before TOE Delivery but which does not provide any functionality thereafter.									
	Impostor	A person who applies for and obtains a document by assuming a false name and identity, or a person who alters his or her physical appearance to represent himself or herself as another person for the purpose of using that person's document. [SS]									
	Initialisation Data	Any data defined by the TOE Manufacturer and injected into the non-volatile memory by the Integrated Circuits manufacturer (Phase 2). These data are for instance used for traceability and for IC identification I (IC identification data).									
IC	Integrated circuit	Electronic component(s) designed to perform processing and/or memory functions. The MultiApp's chip is a integrated circuit.									
	Personalization	The process by which the, signature and biographical data are applied to the document. [SS]									
	Personalization Agent	The agent acting on the behalf of the issuing State or organization to personalize the TOE for the holder.									
	Personalization Agent Authentication Information	TSF data used for authentication proof and verification of the Personalization Agent.									
	Pre- personalization Data	Any data that is injected into the non-volatile memory of the TOE by the TOE Manufacturer (Phase 2) for traceability of non-personalized TOE's and/or to secure shipment within or between life cycle phases 2 and 3. It contains (but is not limited to) the Personalization Agent Key Pair.									
	Pre –personalized TOE's chip	TOE's chip equipped with pre-personalization data.									
	TSF data	Data created by and for the TOE, that might affect the operation of the TOE (CC part 1 [1 ]).									
	User data	Data created by and for the user, that does not affect the operation of the TSF (CC part 1 [1]).									



## 2. <u>TOE OVERVIEW</u>

### 2.1 TOE DESCRIPTION

IAS is a Java Card application that provides a Secure Signature Creation Device [SSCD] as defined in the REGULATION N° 910/2014 of the European Parliament and of the Council of 23<sup>rd</sup> July 2014 on electronic identification and trust services for electronic transactions in the internal market and repealing Directive 1999/93/EC.

[PP-SSCD] defines protection profiles for SSCD:

- [PP-SSCD-KG] is a protection profile for an SSCD with SCD/SVD key generation and signature creation.
- [PP-SSCD-KI] is a protection profile for an SSCD with SCD key import and signature creation.

[PP-SSCD] also defines possible extensions for the above protection profiles (included in this TOE):

- [EN-419211-4] defines extensions for [PP-SSCD-KG] with trusted communication between SSCD and CGA.
- [EN-419211-5] defines extensions for [PP-SSCD-KG] with trusted communication between SSCD and SCA.
- [EN-419211-6] defines extensions for [PP-SSCD-KI] with trusted communication between SSCD and SCA.

In this document the terminology of [PP-SSCD] is used. In particular, the Signatory's Reference Authentication Data (RAD) is the PIN stored in the card and the Signatory's Verification Authentication Data (VAD) is the PIN provided by the user.

The IAS application can be used in contact (T=0 and T=1) or contactless (T=CL) mode.

The IAS application supports:

- The import of the SCD via a trusted channel
- The (on-board) generation of SCD/SVD pairs
- The generation of electronic signatures
- The export of the SVD to the certification generation application (CGA)
- PIN Policy features :PIN Length, Char set used , overall quality checking, PIN change before first used, PIN history

IAS is aimed to create legal valid signatures and therefore provides mechanisms to ensure the secure signature creation as:

- Authentication of the signatory by PIN or BioPIN,
- Authentication of the administrator (mutual authentication):
  - Symmetric scheme with TDES or AES
- Asymmetric scheme with Diffie-Hellman based on RSA or elliptic curves
- Integrity of access conditions to protected data (SCD, RAD),
- Integrity of the data to be signed (DTBS),
- External communication protection against disclosure and corruption (secure messaging),
- Access control to commands and data by authorized users.

The functionalities of IAS Classic 5.0 other than the ones from SSCD are out of scope of the TOE perimeter. For BioPIN (MOC Server v3.0 application) provides biometry recognition with fingerprint, facial recognition is out of the scope of the CC certification.



## 2.2 TOE BOUNDARIES

The Target of Evaluation (TOE) is the Secure Signature Creation Device (SSCD) IAS defined by:

- The underlying Integrated Circuit
- The MultiApp V4.2 platform (JavaCard platform)
- The IAS Classic Application V5
- The BioPin application (MOC Server Application V3.0).

The figure below gives a description of the TOE and its boundaries (red dash line).

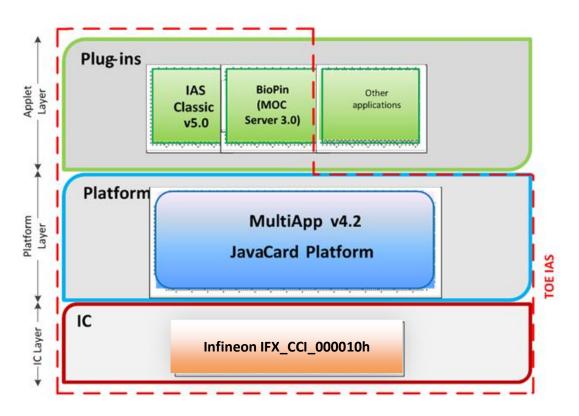


Figure 1: TOE Boundaries

On Figure 1, the block 'Other applications' refers to the following ones:

- MPCOS
- PureDI
- FIDO u2f
- OATH
- Tacho
- MSFT PnP
- LDSV2.0





## 2.3 TOE LIFE-CYCLE

## 2.3.1 Actors

Actors	Identification					
Integrated Circuit (IC) Developer	Infineon					
Embedded Software Developer	Gemalto					
Integrated Circuit (IC) Manufacturer	Infineon					
Module manufacturer	Infineon					
Initializer/Pre-personalizer	Gemalto					
Administrator or Personalization Agent	The agent who personalizes the SSCD for the holder.					
Signatory or SSCD Holder	The rightful holder of the TOE for whom the Administrator personalizes the SSCD.					

Table 1: Identification of the actors

## 2.3.2 Four phases

The TOE life cycle is described in terms of the four life cycle phases:

#### Phase 1 "Development":

The TOE is developed in phase 1. The IC developer develops the integrated circuit, the IC Dedicated Software and the guidance documentation associated with these TOE components.

The Embedded Software developer uses the guidance documentation for the integrated circuit and the guidance documentation for relevant parts of the IC Dedicated Software and develops the IC Embedded Software (operating system), the SSCD application and the guidance documentation associated with these TOE components. As a result the flashmask is generated (HEX file) with initialisation and pre-personalisation scripts.

#### Phase 2 "Manufacturing":

In a first step the IC is produced by the IC manufacturer including the Infineon flash loader and protected by a dedicated transport key. The creation of the Module can be done by Gemalto or Infineon.

Then the module is put on a dedicated form factor (Card, Inlay, other) by Gemalto or a Form factor manufacturer.

The SSCD manufacturer (Gemalto) has the following tasks:

- Initialization: Load the Gemalto software (flash mask including the platform and the applications) in the flash memory
- **Pre-personalization:** initialization of the SSCD application.





#### Phase 3 Personalization of the TOE:

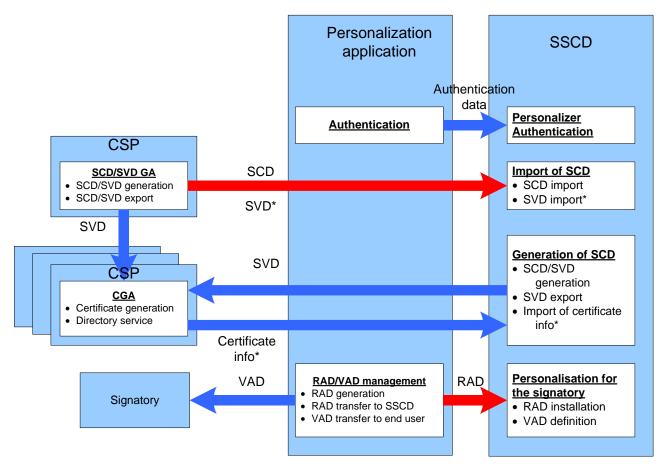


Figure 2: TOE Personalization

RAD Import in the Personalization phase,

- The Personalizor (Administrator) authenticates himself to the TOE.
- The Personalizor (Administrator) sends the RAD to the TOE.
- The RAD shall also be securely sent to the Signatory.

SCD Import in the Personalization phase,

- The Personalizor (Administrator) authenticates himself to the TOE.
- The Personalizor (Administrator) requests the generation of a SCD/SVD key pair on the CSP.
- The SCD / SVD pair is generated.
- The SCD is sent to the TOE.
- The SVD is sent to the CGA.
- The CGA generates the certificate.
- The certificate info is imported into the TOE.

SCD/SVD generation in the Personalization phase,

- The Personalizor (Administrator) authenticates himself to the TOE.
- The Personalizor (Administrator) requests the generation of a SCD/SVD key pair on the SSCD.
- The SCD / SVD pair is generated in the TOE.
- The SVD is sent to the CGA.
- The CGA generates the certificate.
- The certificate info is imported into the TOE.





Phase 4 "Operational Use"

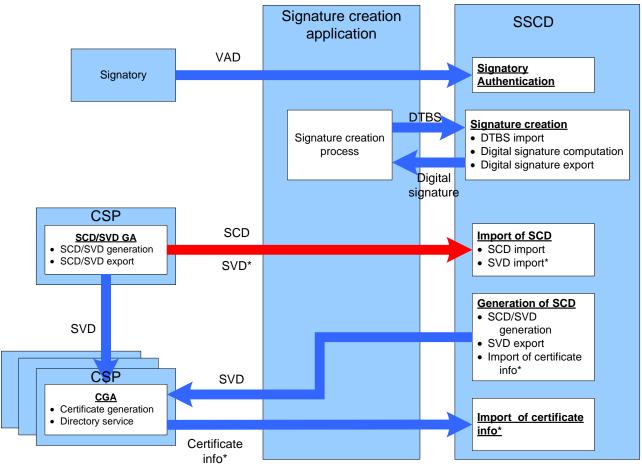


Figure 3: TOE Operational Use

SCD/SVD generation in the usage phase,

- The signatory enters his PIN code (VAD) to authenticate himself to the TOE.
- The signatory requests the generation of a SCD/SVD key pair on the SSCD.
- The SCD / SVD pair is generated in the TOE.
- The SVD is sent to the CGA.
- The CGA generates the certificate.
- The certificate info is imported into the TOE.

SCD Import in the usage phase,

- The signatory authenticates himself to the TOE.
- The signatory requests the generation of a SCD/SVD key pair on the CSP.
- The SCD / SVD pair is generated.
- The SCD is sent to the TOE.
- The SVD is sent to the CGA.
- The CGA generates the certificate.
- The certificate info is imported into the TOE.





Signature Creation in the usage phase,

- The signatory enters his PIN code (VAD) to authenticate himself to the TOE.
- The signatory sends the DTBS or DTBS representation to the TOE.
- The TOE computes the Signature.
- The TOE sends the Signature to the SCA

As a summary description of how the parts of the TOE are delivered to the final customer, the IAS Classic v5.0 application is delivered conjointly with the MultiApp platform in form of a smart card, inlay or module form factor. The form factor is packaged on Gemalto's manufacturing facility and sent to final customer premises.

The different guides accompanying the TOE and parts of the TOE are the ones specified in [AGD] section. They are delivered in form of electronic documents (\*.pdf) by Gemalto's Technical representative.

## 2.3.3 TOE Delivery

The TOE is delivered as a whole package with the Platform (MultiApp v4.2). There is no distinction between the delivery of the platform MultiApp v4.2 and this TOE. Please refer to section 2.5.4 on the platform Security Target [ST-PLTF].

Regarding the documentation to be delivered, a part from the one described on section 2.5.4 of the platform Security Target [ST-PLTF], the documentation found on [AGD] accompanies this TOE. The documentation is delivered in form of electronic documents (\*.pdf) by Gemalto's Technical representative via a secure file sharing platform download action.



## 3. CONFORMANCE CLAIMS

## 3.1 CC CONFORMANCE CLAIM

This security target claims conformance to

- [CC-1]
- [CC-2]
- [CC-3]

as follows

- Part 2 extended,
- Part 3 conformant.

The

• [CEM] has to be taken into account.

The evaluation of the TOE uses the result of the CC evaluation of the platform MultiApp V4.2 claiming conformance to [PP-JCS-Open].

## 3.2 PP CLAIM

This MultiApp V4.2 IAS security target claims strict conformance to the following Protection Profiles:

- [PP-SSCD-KG TCCGA TCSCA] including [PP-SSCD-KG], which defines security requirements for an SSCD with SCD/SVD key generation and signature creation, with extension [EN-419211-4] related to trusted communication between SSCD and CGA and extension [EN-419211-5] related to trusted communication between SSCD and SCA.
- [PP-SSCD-KI TCSCA] including [PP-SSCD-KI], which defines security requirements for an SSCD with SCD key import and signature creation with extension [EN-419211-6] related to trusted communication between SSCD and SCA.

The evaluation is a composite evaluation and uses the results of the CC evaluation of the MultiApp V4.2 platform. The platform embedded software has been evaluated at level EAL 5+. The security problem definition, the objectives, and the SFR of the platform are not described in this document but in [ST-PLTF].

The MultiApp V4.2 JCS security target [ST-PLTF], claims demonstrable conformance to the Protection Profile "JavaCard System – Open configuration", ANSSI-PP-2010- 03-M01, Version 3.0 ([PP-JCS-Open]).

## 3.3 PACKAGE CLAIM

This ST is conforming to assurance package EAL5 augmented with ALC\_DVS.2 and AVA\_VAN.5 defined in CC part 3 [CC-3].



## 4. SECURITY PROBLEM DEFINITION

## 4.1 GENERAL

The assets, threats, OSP, and assumptions of the TOE are those defined in [PP-SSCD-KG], [PP-SSCD-KI] (no additional assets, threats, OSP, and assumptions in extension [EN 419211-4], [EN 419211-5], [EN 419211-6]).The present Security Target deals with the assets, threats, OSP, and assumptions of [PP-SSCD-KG] and [PP-SSCD-KI].

The assets of [PP-JCS-Open] are studied in [ST-PLTF].

The Common Criteria define assets as entities that the owner of the TOE presumably places value upon. The term "asset" is used to describe the threats in the operational environment of the TOE.

#### Assets and objects:

- 1. SCD: private key used to perform an electronic signature operation. The confidentiality, integrity and signatory's sole control over the use of the SCD must be maintained.
- 2. SVD: public key linked to the SCD and used to perform electronic signature verification. The integrity of the SVD when it is exported must be maintained.
- 3. DTBS and DTBS/R: set of data, or its representation, which the signatory intends to sign. Their integrity and the unforgeability of the link to the signatory provided by the electronic signature must be maintained.

#### User and subjects acting for users:

- 1. User: End user of the TOE who can be identified as Administrator or Signatory. The subject S.User may act as S.Admin in the role R.Admin or as S.Sigy in the role R.Sigy.
- 2. Administrator: User who is in charge to perform the TOE initialisation, TOE personalisation or other TOE administrative functions. The subject S.Admin is acting in the role R.Admin for this user after successful authentication as Administrator.
- 3. Signatory: User who holds the TOE and uses it on his own behalf or on behalf of the natural or legal person or entity he represents. The subject S.Sigy is acting in the role R.Sigy for this user after successful authentication as Signatory.

#### Threat agents:

1. Attacker: human or process acting on his behalf located outside the TOE. The main goal of the attacker is to access the SCD or to falsify the electronic signature. The attacker has got a high attack potential and knows no secret.

### 4.2 THREATS

**T.SCD\_Divulg** Storing , copying, and releasing of the signature-creation data

An attacker stores or copies the SCD outside the TOE. An attacker can obtain the SCD during generation, storage and use for signature-creation in the TOE.

#### T.SCD\_Derive Derive the signature-creation data

An attacker derives the SCD from publicly known data, such as SVD corresponding to the SCD or signatures created by means of the SCD or any other data exported outside the TOE, which is a threat against the secrecy of the SCD.

#### **T.Hack\_Phys** *Physical attacks through the TOE interfaces*





An attacker interacts with the TOE to exploit vulnerabilities, resulting in arbitrary security compromises. This threat is directed against SCD, SVD and DTBS.

#### **T.SVD\_Forgery** Forgery of signature-verification data

An attacker forges the SVD presented by the CSP to the CGA. This results in loss of SVD integrity in the certificate of the signatory.

#### **T.SigF\_Misuse** *Misuse of the signature creation function of the TOE*

An attacker misuses the signature-creation function of the TOE to create SDO for data the signatory has not decided to sign. The TOE is subject to deliberate attacks by experts possessing a high attack potential with advanced knowledge of security principles and concepts employed by the TOE.

#### **T.DTBS\_Forgery** Forgery of the DTBS-representation

An attacker modifies the DTBS/R sent by the SCA. Thus the DTBS/R used by the TOE for signing does not match the DTBS the signatory intended to sign.

#### **T.Sig\_Forgery** Forgery of the electronic signature

An attacker forges a signed data object, maybe using an electronic signature which has been created by the TOE and the violation of the integrity of the signed data object is not detectable by the signatory or by third parties. The signature created by the TOE is subject to deliberate attacks by experts possessing a high attack potential with advanced knowledge of security principles and concepts employed by the TOE.

### 4.3 ORGANIZATIONAL SECURITY POLICIES

The Secure Signature Creation Device usage is for advanced electronic signature. So it is mandatory to follow the organisational security policy proposed by [PP-SSCD-KG] and [PP-SSCD-KI].

#### P.CSP\_QCert Qualified certificate

The CSP uses a trustworthy CGA to generate a qualified certificate or non-qualified certificate (see previous directive 1999/93 article 2, clause 9, and Annex I or new [Regulation EU], article 3, clause 14, and Annex I) for the SVD generated by the SSCD. The certificates contain at least the name of the signatory and the SVD matching the SCD implemented in the TOE under sole control of the signatory. The CSP ensures that the use of the TOE as SSCD is evident with signatures through the certificate or other publicly available information.

#### P.Qsign Qualified electronic signatures

The signatory uses a signature-creation system to sign data with an advanced electronic signature (cf. previous directive 1999/93 article 1, clause 2 or new [Regulation EU],, Article 3, clause 11), which is a qualified electronic signature if it is based on a valid qualified certificate (according to the previous directive 1999/93 Annex I or new [Regulation EU], Annex I)<sup>1</sup>.

The DTBS are presented to the signatory and sent by the SCA as DTBS/R to the SSCD. The SSCD creates the electronic signature created with a SCD implemented in the SSCD that the signatory maintain under his sole control and is linked to the DTBS/Rin such a manner that any subsequent change of the data is detectable.

#### **P.Sigy\_SSCD** TOE as secure signature-creation device

The TOE meets the requirements for an SSCD laid down in Annex III of the previous directive 1999/93 or in Annex II of the new [Regulation EU]]. This implies the SCD is used for signature creation under sole control of the signatory and the SCD can practically occur only once.

<sup>&</sup>lt;sup>1</sup> It is a non-qualified advanced electronic signature if it is based on a non-qualified certificate for the SVD.





#### P.Sig\_Non-Repud Non-repudiation of signatures

The life cycle of the SSCD, the SCD and the SVD shall be implemented in a way that the signatory is not able to deny having signed data if the signature is successfully verified with the SVD contained in their unrevoked certificate.

#### **P.Pre-personalisation** Strong authentication in pre-personalisation

During pre-personalisation, The TOE protects itself with strong authentication.

### 4.4 ASSUMPTIONS

The assumptions describe the security aspects of the environment in which the TOE will be used or is intended to be used.

#### A.CGA Trustworthy certification-generation application

The CGA protects the authenticity of the signatory's name or pseudonym and the SVD in the (qualified) certificate by an advanced electronic signature of the CSP.

#### A.SCA Trustworthy signature-creation application

The signatory uses only a trustworthy SCA. The SCA generates and sends the DTBS/R of the data the signatory wishes to sign in a form appropriate for signing by the TOE.

#### A.CSP Secure SCD/SVD management by CSP

The CSP uses only a trustworthy SCD/SVD generation device and ensures that this device can be used by authorised user only. The CSP ensures that the SCD generated practically occurs only once, that generated SCD and SVD actually correspond to each other and that SCD cannot be derived from the SVD. The CSP ensures the confidentiality of the SCD during generation and export to the TOE, does not use the SCD for creation of any signature and irreversibly deletes the SCD in the operational environment after export to the TOE.

#### Assumptions coming from the platform:

#### A.APPLET

Applets loaded post-issuance do not contain native methods. The Java Card specification explicitly "does not include support for native methods" ([JCVM222], §3.3) outside the API.

#### A.VERIFICATION

All the bytecodes are verified at least once, before the loading, before the installation or before the execution, depending on the card capabilities, in order to ensure that each bytecode is valid at execution time.

#### A.Insp\_Sys Inspection Systems for global interoperability

The Extended Inspection System (EIS) for global interoperability (i) implements at least the terminal part of PACE [ICAO-TR-SAC]. If several protocols are supported by the EIS, PACE secure channel must be established and applicative data (e.g. the logical travel document) must be transferred under PACE. Other operations may be done when additional protocols are supported by the terminal.

#### 4.5 JUSTIFICATIONS FOR ADDING ASSUMPTIONS ON THE ENVIRONMENT

#### 4.5.1.1 Additions to [PP-SSCD-KG]

The only additional assumption on the environment is A.CSP. This assumption deals with the SCD generation when the SCD is generated off-TOE and imported afterwards. These two operations are outside the scope of [PP-SSCD-KG]. Therefore the added assumption does not weaken the TOE.







## 5. <u>SECURITY OBJECTIVES</u>

### 5.1 GENERALS

This section identifies and defines the security objectives for the TOE and its environment. Security objectives reflect the stated intent and counter the identified threats, as well as comply with the identified organisational security policies and assumptions.

The security objectives of the TOE are those defined in [PP-SSCD-KG], [PP-SSCD-KI] and updated regarding related extension [EN-419211-4], [EN 419211-5], [EN 419211-6]

The present Security Target deals with security objectives of [PP-SSCD-KG] and [PP-SSCD-KI] and updated regarding related extension [EN-419211-4], [EN 419211-5], [EN 419211-6]

The security objectives stated in [PP-JCS-Open] can be found in [ST-PLTF].

### 5.2 SECURITY OBJECTIVES FOR THE TOE

#### 5.2.1 Common to Part 2 and Part 3

#### OT.Lifecycle\_Security Lifecycle security

The TOE shall detect flaws during the initialisation, personalisation and operational usage. The TOE shall securely destroy the SCD on demand of the signatory.

#### **OT.SCD\_Secrecy** Secrecy of signature-creation data

The secrecy of the SCD (used for signature generation) shall be reasonably assured against attacks with a high attack potential.

#### **OT.Sig\_Secure** Cryptographic security of the electronic signature

The TOE shall create digital signatures that cannot be forged without knowledge of the SCD through robust encryption techniques. The SCD shall not be reconstructable using the digital signatures or any other data exported from the TOE. The digital signatures shall be resistant against these attacks, even when executed with a high attack potential.

#### **OT.Sigy\_SigF** Signature generation function for the legitimate signatory only

The TOE shall provide the digital signature creation function for the legitimate signatory only and protects the SCD against the use of others. The TOE shall resist attacks with high attack potential.

#### **OT.DTBS\_Integrity\_TOE** DTBS/R integrity inside the TOE

The TOE must not alter the DTBS/R As by definition of the DTBS/R this may consist of the DTBS themselves, this objective does not conflict with a signature creation process where the TOE hashes the provided DTBS (in part or entirely) for signature creation.

#### OT.EMSEC\_Design Provide physical emanations security

The TOE shall be designed and built in such a way as to control the production of intelligible emanations within specified limits.

#### OT.Tamper\_ID Tamper detection

The TOE shall provide system features that detect physical tampering of its components, and uses those features to limit security breaches.

#### **OT.Tamper\_Resistance** Tamper resistance

The TOE shall prevent or resists physical tampering with specified system devices and components.





## 5.2.2 Part 2 specific

#### OT.SCD/SVD\_Auth\_Gen Authorized SCD/SVD generation

The TOE shall provide security features to ensure that authorised users only may invoke the generation of the SCD and the SVD.

#### **OT.SCD\_Unique** Uniqueness of the signature-creation data

The TOE shall ensure the cryptographic quality of an SCD/SVD pair it creates as suitable for the advanced or qualified electronic signature. The SCD used for signature creation can practically occur only once and shall not be reconstructable from the SVD. In that context 'practically occur once' means that the probability of equal SCDs is negligible.

#### **OT.SCD\_SVD\_Corresp** Correspondence between SVD and SCD

The TOE shall ensure the correspondence between the SVD and the SCD generated by the TOE. This includes unambiguous reference of a created SVD/SCD pair for export of the SVD and in creating a digital signature creation with the SCD.

## 5.2.3 Part 3 specific

#### OT.SCD\_Auth\_Imp Authorised SCD import

The TOE shall provide security features to ensure that authorised users only may invoke the import of the SCD.

## 5.2.4 Part 4 specific (additional security objectives related to part 2)

#### **OT.TOE\_SSCD\_Auth** Authentication proof as SSCD

The TOE shall hold unique identity and authentication data as SSCD and provide security mechanisms to identify and to authenticate itself as SSCD.

#### **OT.TOE\_TC\_SVD\_Exp** *TOE* trusted channel for SVD export

The TOE shall provide a trusted channel to the CGA to protect the integrity of the SVD exported to the CGA. The TOE shall enable the CGA to detect alteration of the SVD exported by the TOE.

# 5.2.5 Part 5 and part 6 extension (additional security objectives related to part 2 & part 3)

#### **OT.TOE\_TC\_VAD\_Imp** *Trusted channel of TOE for VAD import*

The TOE shall provide a trusted channel for the protection of the confidentiality and integrity of the VAD received from the HID as needed by the authentication method employed.

#### OT.TOE\_TC\_DTBS\_Imp Trusted channel of TOE for DTBS import

The TOE shall provide a trusted channel to the SCA to detect alteration of the DTBS/R received from the SCA. The TOE must not generate electronic signatures with the SCD for altered DTBS.

### 5.2.6 Extensions

#### **OT.Pre-perso\_authentication** Strong authentication in pre-personalisation

During pre-personalisation, The TOE protects itself with strong authentication.





### 5.3 SECURITY OBJECTIVES FOR THE OPERATIONAL ENVIRONMENT

## 5.3.1 Common to Part 2 and Part 3

#### **OE.SVD\_Auth** Authenticity of the SVD

The operational environment ensures the integrity of the SVD send to the CGA of the CSP. The CGA verifies the correspondence between the SCD in the SSCD of the signatory and the SVD in the qualified certificate.

#### OE.CGA\_Qcert

Generation of qualified certificates

The CGA shall generate a qualified certificate that includes, (amongst others)

- (a) the name of the signatory controlling the TOE,
- (b) the SVD matching the SCD stored in the TOE and being under sole control of the signatory,
- (c) the advanced signature of the CSP.

The CGA shall confirm with the generated qualified certificate that the SCD corresponding to the SVD is stored in a SSCD.

#### OE.DTBS\_Intend

#### SCA sends data intended to be signed

The signatory shall use a trustworthy SCA that

- (a) generates the DTBS/R of the data that has been presented as DTBS and which the signatory intends to sign in a form which is appropriate for signing by the TOE,
- (b) sends the DTBS/R to the TOE and enables verification of the integrity of the DTBS/R by the TOE,

(c) attaches the signature produced by the TOE to the data or provides it separately.

#### **OE.Signatory** Security obligation of the Signatory

The Signatory checks that the SCD stored in the SSCD received from SSCD-provisioning service is in nonoperational state. The Signatory keeps their VAD confidential.

### 5.3.2 Part 3 specific

#### **OE.SSCD\_Prov\_Service** Authentic SSCD provided by SSCD Provisioning Service

The SSCD-provisioning service shall initialise and personalise for the signatory an authentic copy of the TOE and deliver this copy as SSCD to the signatory.

Remark : This Objective is specific to part 3 due to the adding of part 4.

#### **OE.SCD/SVD\_Auth\_Gen** Authorized SCD/SVD generation

The CSP shall provide security features to ensure that authorised users only may invoke the generation of the SCD and the SVD.

#### OE.SCD\_Secrecy SCD Secrecy

The CSP shall protect the confidentiality of the SCD during generation and export to the TOE. The CSP shall not use the SCD for creation of any signature and shall irreversibly delete the SCD in the operational environment after export to the TOE.

#### **OE.SCD\_Unique** Uniqueness of the signature-creation data

The CSP shall ensure the cryptographic quality of the SCD/SVD pair, which is generated in the environment, for the qualified or advanced electronic signature. The SCD used for signature generation shall





practically occur only once i.e. the probability of equal SCDs shall be negligible, and the SCD shall not be reconstructable from the SVD

#### **OE.SCD\_SVD\_Corresp** Correspondence between SVD and SCD

The CSP shall ensure the correspondence between the SVD and the SCD generated by the CSP. This includes the correspondence between the SVD send to the CGA and the SCD exported to the TOE of the signatory identified in the SVD certificate.

### 5.3.3 Part 4 specific (additional security objectives related to part 2)

Part 4 substitutes OE.SSCD\_Prov\_Service from the core PP( part 2) by OE.Dev\_Prov\_Service and adds security objectives for the operational environment OE.CGA\_SSCD\_Auth and OE.CGA\_TC\_SVD\_Imp in order to address the additional method of use as SCD/SVD pair generation after delivery to the signatory and outside the secure preparation environment.

#### **OE.Dev\_Prov\_Service** Authentic SSCD provided by SSCD Provisioning Service

The SSCD Provisioning Service handles authentic devices that implement the TOE, prepares the TOE for proof as SSCD to external entities, personalises the TOE for the legitimate user as signatory, links the identity of the TOE as SSCD with the identity of the legitimate user, and delivers the TOE to the signatory. Note: This objective replaces OE.SSCD\_Prov\_Service from the core PP, which is possible as it does not imply any additional requirements for the operational environment when compared to OE.SSCD Prov Service is a subset of OE.SSCD Prov Service).

#### **OE.CGA\_SSCD\_Auth** *Pre-initialisation of the TOE for SSCD authentication*

The CSP shall check by means of the CGA whether the device presented for application of a (qualified) certificate holds unique identification as SSCD, successfully proved this identity as SSCD to the CGA, and whether this identity is linked to the legitimate holder of the device as applicant for the certificate.

#### **OE.CGA\_TC\_SVD\_Imp** CGA trusted channel for SVD import

The CGA shall detect alteration of the SVD imported from the TOE with the claimed identity of the SSCD.

The developer prepares the TOE by pre-initialisation for the delivery to the customer (i.e. the SSCD provisioning service) in the development phase not addressed by a security objective for the operational environment. The SSCD Provisioning Service performs initialisation and personalisation as TOE for the legitimate user (i.e. the Device holder). If the TOE is delivered to the Device holder with SCD the TOE is a SSCD. This situation is addressed by OE.SSCD Prov Service except the additional initialisation of the TOE for proof as SSCD and trusted channel to the CGA. If the TOE is delivered to the Device holder without a SCD the TOE will be a SSCD only after generation of the first SCD/SVD pair. Because this SCD/SVD pair generation is performed by the signatory in the operational use stage the TOE provides additional security functionality addressed by OT.TOE\_SSCD\_Auth and OT.TOE\_TC\_SVD\_Exp. But this security functionality must be initialised by the SSCD Provisioning Service as described in OE.Dev Prov Service. Therefore this PP (part4) substitutes OE.SSCD\_Prov\_Service by OE.Dev\_Prov\_Service allowing generation of the first SCD/SVD pair after delivery of the TOE to the Device holder and requiring initialisation of security functionality of the TOE. Nevertheless the additional security functionality must be used by the operational environment as described in OE.CGA\_SSCD\_Auth and OE.CGA\_TC\_SVD\_Imp. This approach does not weaken the security objectives of and requirements to the TOE but enforce more security functionality of the TOE for additional method of use. Therefore it does not conflict with the CC conformance claim to the core [PP\_SSCD\_KG]

# 5.3.4 Part 5 and part 6 extension (additional security objectives related to part 2 & part 3)

Part 5 and part 6 substitute OE.HI\_VAD from the core PP by OE.HID\_TC\_VAD\_Exp and OE.DTBS\_Protect from the core PP by OE.SCA\_TC\_DTBS\_Exp

**OE.HID\_TC\_VAD\_Exp** Trusted channel of HID for VAD export



The HID provides the human interface for user authentication. The HID will ensure confidentiality and integrity of the VAD as needed by the authentication method employed including export to the TOE by means of a trusted channel.

#### **OE.SCA\_TC\_DTBS\_Exp** Trusted channel of SCA for DTBS export

The SCA provides a trusted channel to the TOE for the protection of the integrity of the DTBS to ensure that the DTBS/R cannot be altered undetected in transit between the SCA and the TOE.

## 5.3.5 From Platform

#### **OE.VERIFICATION**

All the bytecodes shall be verified at least once, before the loading, before the installation or before the execution, depending on the card capabilities, in order to ensure that each bytecode is valid at execution time. See #.VERIFICATION for details.

Additionally the applet shall follow all recommendations, if any, mandated in the platform guidance for maintaining the isolation property of the platform.

Application Note:

Constraints to maintain the isolation property of the platform are provided by the platform developer in application development guidance. The constraints apply to all application code loaded in the platform.

#### OE.APPLET

No applet loaded post-issuance shall contain native methods.

#### OE.CODE-EVIDENCE

For application code loaded pre-issuance, evaluated technical measures implemented by the TOE or audited organizational measures must ensure that loaded application has not been changed since the code verifications required in OE.VERIFICATION.

For application code loaded post-issuance and verified off-card according to the requirements of OE.VERIFICATION, the verification authority shall provide digital evidence to the TOE that the application code has not been modified after the code verification and that he is the actor who performed code verification.

For application code loaded post-issuance and partially or entirely verified on-card, technical measures must ensure that the verification required in OE.VERIFICATION are performed. On-card bytecode verifier is out of the scope of this Protection Profile.

#### Application Note:

For application code loaded post-issuance and verified off-card, the integrity and authenticity evidence can be achieved by electronic signature of the application code, after code verification, by the actor who performed verification.

#### OE.Prot\_Logical\_Data Protection of TOE and applicative data

The inspection system of the applicative entity (e.g. receiving State or Organisation) ensures the confidentiality and integrity of the data read from the TOE and applicative data (e.g. logical travel document). The inspection system will prevent eavesdropping to their communication with the TOE before secure messaging is successfully established.



## 5.4 SECURITY OBJECTIVE RATIONALE

Threats - Assumptions - Policies / Security Objectives	OT. Lifecyde_Security	OT.SCD_Secredy	OT.Sig_Secure	OT.Sigy_SigF	OT.DTBS_Integrity_TOE	OT.EM SEC_Design	OT. Tamper_ID	OT. Tamper_Resistance	OT.SCD/SVD_Auth_Gen	OT.SCD-Unique	OT.SCD_SVD_Corresp	OT.SCD_Auth_Imp	OT. Pre-per sonalisation	OT. TOE_SSCD_Auth (part 4)	OT.TOE_SVD_Exp (part 4)	OT. TOE_TC_VAD_1mp (part 5 & 6)	OT.TOE_DTBS_Imp (part 5 & 6)	OE.SVD_Auth	OE. CGA_QCert	OE.SSCD_Prov_Service (part 3)	OE. DTBS_Intend	OE. Sig nat ory	OE.SCD/SVD_Auth_Gen	OE.SCD_Secreoy	OE.SCD_Unique	OE.SCD_SVD_Corresp	OE.Dev_Prov_Service (part 4) replace	OE.SSCD_Prov_Service (in part 2)	OE.CGA_SSCD_Auth (part 4)	OE. CGA_TC_SVD_Imp (part 4)	OE.HID_TC_VAD_Exp (part 5 & 6) replace	OE. HID_VAD	OE.SCA_TC_DTBS_Exp (part 5 & 6) replace	OE. DTBS_Protect	OE. VERIFICATION	OE. APPLET	OE. CODE-EVIDEN CE	OE. Prot_Logical_Data
T.SCD_Divulg		Х										Х											Х	Х														
T.SCD_Derive			Х						Х																Х													
T.Hack_Phys		Х				Х	Х	Х																														
T.SVD_Forgery											Х				Х			Х								Х				Х								
T.SigF_Misuse	Х			Х	Х											Х	Х				Х	Х									Х	Х	Х	Х				
T.DTBS_Forgery					Х												Х				Х													Х				
T.Sig_Forgery			Х							Х									Х						Х													
P.CSP_Qcert	Х										Х	Х		Х					Х				Х			Х			Х									
P. Qsign			Х	Х															Х		Х																	
P.Sigy_SSCD	Х	Х	Х	Х	Х	Х		Х	Х	Х		Х		Х	Х					Х			Х	Х	Х		Х	Х	Х	Х								
P.Sig_Non-Repud	Х	Х	Х	Х	Х	Х	Х	Х		Х	Х			Х	Х	Х	Х	Х	Х	Х	Х	Х		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х				
P.Pre-personalisation													Х																									
A.SCA																					Х																	
A.CGA																		Х	Х																			
A.CSP																							Х	Х	Х	Х												
A. APPLET																																				Х		
A.VERIFICATION																																			Х		Х	
A. Insp_Sys																																						Х

Table 2: Threats, Assumptions, and Policies vs. Security objectives

## 5.4.1 Threats

**T.SCD\_Divulg (***Storing, copying and releasing of the signature creation data***)** addresses the threat against the legal validity of electronic signature due to storage and copying of SCD outside the TOE, as expressed in recital (18) of the previous directive 1999/93 or in Annex II of [Regulation EU], . This threat is countered by:

- OT.SCD\_Secrecy, which assures the secrecy of the SCD during use by the TOE for signature creation,
- OE.SCD\_Secrecy, which assures the secrecy of the SCD in the CSP environment (when SCD is generated off-TOE),

Furthermore, generation and/or import of SCD known by an attacker is countered by:

- OE.SCD/SVD\_Auth\_Gen, which ensures that only authorized SCD generation in the environment is possible (when SCD is generated off-TOE), and
- OT.SCD\_Auth\_Imp, which ensures that only authorised SCD import is possible (when SCD is generated off-TOE).

**T.SCD\_Derive** (*Derive the signature creation data*) deals with attacks on the SCD via public known data produced by the TOE, which are the SVD and the signatures created with the SCD.

OT.SCD/SVD\_Auth\_Gen counters this threat by implementing cryptographically secure generation of the SCD/SVD pair (when SCD is generated on-TOE).

OE.SCD\_Unique counters this threat by implementing cryptographically secure generation of the SCD/SVD pair (when SCD is generated off-TOE).

OT.Sig\_Secure ensures cryptographically secure electronic signatures.

**T.Hack\_Phys (***Exploitation of physical vulnerabilities***)** deals with physical attacks exploiting physical vulnerabilities of the TOE. OT.SCD\_Secrecy preserves the secrecy of the SCD. OT.EMSEC\_Design counters physical attacks through the TOE interfaces and observation of TOE emanations. OT.Tamper\_ID



and OT.Tamper\_Resistance counter the threat T.Hack\_Phys by detecting and by resisting tampering attacks.

**T.SVD\_Forgery** (*Forgery of the signature verification data*) deals with the forgery of the SVD exported by the TOE to the CGA for certificate generation. T.SVD\_Forgery is addressed by:

- OT.SCD\_SVD\_Corresp, which ensures correspondence between SVD and SCD and unambiguous reference of the SVD/SCD pair for the SVD export and signature creation with the SCD (when SCD is generated on-TOE),
- OE.SCD\_SVD\_Corresp, which ensures correspondence between SVD and SCD and unambiguous reference of the SVD/SCD pair for the SVD export and signature creation with the SCD (when SCD is generated off-TOE), and
- OE.SVD\_Auth that ensures the integrity of the SVD exported by the TOE to the CGA and verification of the correspondence between the SCD in the SSCD of the signatory and the SVD in the input it provides to the certificate generation function of the CSP.
- (This is specific to [PP SSCD KG] extended with part 4.) Additionally T.SVD\_Forgery is addressed by OT.TOE\_TC\_SVD\_Exp, which ensures that the TOE sends the SVD in a verifiable form through a trusted channel to the CGA, as well as by OE.CGA\_TC\_SVD\_Imp, which provides verification of SVD authenticity by the CGA.

**T.SigF** Misuse (*Misuse of the signature creation function of the TOE*) addresses the threat of misuse of the TOE signature creation function to create SDO by others than the signatory to create an electronic signature on data for which the signatory has not expressed the intent to sign, as required by paragraph 1(c) of Annex III. OT.Lifecycle\_Security (Lifecycle security) requires the TOE to detect flaws during the initialisation, personalisation and operational usage including secure destruction of the SCD, which may be initiated by the signatory. OT.Sigy\_SigF (Signature creation function for the legitimate signatory only) ensures that the TOE provides the signature creation function for the legitimate signatory only. OE.DTBS\_Intend (Data intended to be signed) ensures that the SCA sends the DTBS/R only for data the signatory intends to sign. The combination of OT.TOE TC DTBS Imp (Trusted channel of TOE for DTBS) and OE.SCA TC DTBS Exp (Trusted channel of SCA for DTBS) counters the undetected manipulation of the DTBS during the transmission form the SCA to the TOE. OT.DTBS Integrity TOE (DTBS/R integrity inside the TOE) prevents the DTBS/R from alteration inside the TOE. If the SCA provides a human interface for user authentication. OE.HID TC VAD Exp (Trusted channel of HID for VAD) requires the HID to protect the confidentiality and the integrity of the VAD as needed by the authentication method employed. The HID and the TOE will protect the VAD by a trusted channel between HID and TOE according to OE.HID\_TC\_VAD\_Exp (Trusted channel of HID for VAD) and OT.TOE\_TC\_VAD\_Imp (Trusted channel of TOE for VAD). OE.Signatory (Security obligation of the signatory) ensures that the signatory checks that an SCD stored in the SSCD when received from an SSCD-provisioning service provider is in non-operational state, i.e. the SCD cannot be used before the signatory becomes control over the SSCD. OE. Signatory (Security obligation of the signatory) ensures also that the signatory keeps their VAD confidential.

**T.DTBS\_Forgery** (*Forgery of the DTBS/R*) addresses the threat arising from modifications of the DTBS/R sent to the TOE for signing which than does not correspond to the DTBS/R corresponding to the DTBS the signatory intends to sign. The threat T.DTBS\_Forgery is addressed by the security objectives OT.TOE\_TC\_DTBS\_Imp (Trusted channel of TOE for DTBS) and OE.SCA\_TC\_DTBS\_Exp (Trusted channel of SCA for DTBS), which ensure that the DTBS/R is sent through a trusted channel and cannot be altered undetected in transit between the SCA and the TOE. The TOE counters internally this threat by the means of OT.DTBS\_Integrity\_TOE (DTBS/R integrity inside the TOE) ensuring the integrity of the DTBS/R inside the TOE. The TOE IT environment also addresses T.DTBS\_Forgery by the means of OE.DTBS\_Intend, which ensures that the trustworthy SCA generates the DTBS/R of the data that has been presented as DTBS and which the signatory intends to sign in a form appropriate for signing by the TOE.

**T.Sig\_Forgery** (*Forgery of the electronic signature*) deals with non-detectable forgery of the electronic signature. OT.Sig\_Secure, OT.SCD\_Unique and OE.CGA\_QCert address this threat in general. OT.Sig\_Secure (*Cryptographic security of the electronic signature*) ensures by means of robust cryptographic techniques that the signed data and the electronic signature are securely linked together. OT.SCD\_Unique (when SCD is generated on-TOE) or OE.SCD\_Unique (when SCD is generated off-TOE) ensures that the same SCD cannot be generated more than once and the corresponding SVD cannot be included in another certificate by chance. OE.CGA\_QCert prevents forgery of the certificate for the corresponding SVD, which would result in false verification decision concerning a forged signature.





## 5.4.2 Organisational security policies

#### **P.CSP\_QCert** (CSP generates qualified certificates) Dedicated to [PP SSCD KI]

establishes the CSP generating qualified certificate or non-qualified certificate linking the signatory and the SVD implemented in the SSCD under sole control of his signatory. P.CSP\_QCert is addressed by

- OT.Lifecycle\_Security, which requires the TOE to detect flaws during the initialisation, personalisation and operational usage,
- OT.SCD\_SVD\_Corresp (when SCD is generated on-TOE) or OE.SCD\_SVD\_Corresp (when SCD is generated off-TOE), which requires to ensure the correspondence between the SVD and the SCD during their generation,
- OE.CGA\_QCert for generation of qualified certificates or non-qualified certificates, which requires the CGA to certify the SVD matching the SCD implemented in the TOE under sole control of the signatory.
- OE.SCD/SVD\_Auth\_Gen, which ensures that the SCD/SVD generation can be invoked by authorized users only (when SCD is generated off-TOE),
- OT.SCD\_Auth\_Imp which ensures that authorised users only may invoke the import of the SCD (when SCD is generated off-TOE).

#### Dedicated to [PP SSCD KG] extended with part 4

provides that the TOE and the SCA may be employed to sign data with (qualified) electronic signatures, as defined by previous directive 1999/93 (article 5, paragraph 1) or in the new [Regulation EU], (article 25) refers to SSCDs to ensure the functionality of advanced signatures. The OE.CGA\_QCert addresses the requirement of qualified (or advanced) electronic signatures as being based on qualified (or non-qualified) certificates. According to OT.TOE\_SSCD\_Auth the copies of the TOE will hold unique identity and authentication data as SSCD and provide security mechanisms enabling the CGA to identify and to authenticate the TOE as SSCD to prove this identity as SSCD to the CGA. The OE.CGA\_SSCD\_Auth ensures that the SP checks the proof of the device presented of the applicant that it is a SSCD. The OT.SCD\_SVD\_Corresp ensures that the SVD exported by the TOE to the CGA corresponds to the SCD stored in the TOE and used by the signatory. The OT.Lifecycle\_Security ensures that the TOE detects flaws during the initialisation, personalisation and operational usage.

**P.QSign** (*Qualified electronic signatures*) provides that the TOE and the SCA may be employed to sign data with an advanced electronic signature, which is a qualified electronic signature if based on a valid qualified certificate. OT.Sigy\_SigF ensures signatory's sole control of the SCD by requiring the TOE to provide the signature creation function for the legitimate signatory only and to protect the SCD against the use of others. OT.Sig\_Secure ensures that the TOE creates electronic signatures, which cannot be forged without knowledge of the SCD through robust encryption techniques. OE.CGA\_QCert addresses the requirement of qualified or non-qualified electronic certificates building a base for the electronic signature. OE.DTBS\_Intend ensures that the SCA provides only those DTBS to the TOE, which the signatory intends to sign.

**P.Sigy\_SSCD** (*TOE as secure signature creation device*) requires the TOE to meet Annex III of the previous directive 1999/93 or Annex II of the new [Regulation EU],

Dedicated to [PP SSCD KI]

This is ensured as follows

- OE.SCD\_Unique meets the paragraph 1(a), Annex III of the previous directive 1999/93 or paragraph 1(b) of the new [Regulation EU], Annex II, by the requirements

that the SCD used for signature creation can practically occur only once.

- OE.SCD\_Unique, OT.SCD\_Secrecy and OE.SCD\_Secrecy meet the paragraph 1(a), Annex III of previous directive 1999/93 ot the paragraph 1(a) of the new [Regulation EU],, Annex II, by the requirements to ensure the secrecy of the SCD.

OT.EMSEC\_Design and OT.Tamper\_Resistance address specific objectives to ensure secrecy of SCD against specific attacks.

OT.SCD\_Secrecy and OT.Sig\_Secure meet the paragraph 1(b), Annex III of the previous directive 1999/93 or paragraph 1(c) of the new [Regulation EU], Annex II, by

the requirements to ensure that the SCD cannot be derived from SVD, the digital signatures or any other data exported outside the TOE.

- OT.Sigy\_SigF and OE.SCD\_Secrecy meet the paragraph 1(c), Annex III of the previous directive 1999/93 or paragraph 1(d) of the new [Regulation EU],], Annex II, by

the requirements to ensure that the TOE provides the signature creation function for the legitimate signatory only and protects the SCD against the use of others.



- OT.DTBS\_Integrity\_TOE meets the requirements the paragraph 2, Annex III of **the** previous directive 1999/93 or paragraph 2 of the new [Regulation EU], Annex II, The TOE must not alter the DTBS/R.

Please take note, the requirements of previous directive 1999/93 Annex III, 2 or the new [Regulation EU], Annex II, 2., that the SSCD does not prevent the data to be signed from being presented to the signatory prior to the signature process is obviously fulfilled

by the method of TOE usage: the SCA will present the DTBS to the signatory and send them to the SSCD for signing.

The usage of SCD under sole control of the signatory sole control is ensured by

- OT.Lifecycle\_Security requiring the TOE to detect flaws during the initialisation, personalisation and operational usage

- OE.SCD/SVD\_Auth\_Gen, which limits invocation of the generation of the SCD and the SVD to authorised users only,

- OT.SCD\_Auth\_Imp, which limits SCD import to authorised users only,

- OE.SCD\_Secrecy, which ensures the confidentiality of the SCD during generation and export to the TOE, and deletes the SCD after export to the TOE. The CSP does not use the SCD for signature creation.

- OT.Sigy\_SigF, which requires the TOE to provide the signature creation function for the legitimate signatory only and to protect the SCD against the use of others.

OE.SSCD\_Prov\_Service ensures that the signatory obtains an authentic copy of the TOE, initialised and personalised as SSCD from the SSCD-provisioning service.

### Dedicated to [PP SSCD KG] extended with part 4

The paragraph 1(a) of Annex III is ensured by OT.SCD\_Unique requiring that the SCD used for signature creation can practically occurs only once. The OT.SCD\_Secrecy OT.Sig\_Secure and OT.EMSEC\_Design and OT.Tamper\_Resistance address the secrecy of the SCD (cf. paragraph 1(a) of Annex III). OT.SCD\_Secrecy and OT.Sig\_Secure meet the requirement in paragraph 1(b) of Annex III by the requirements to ensure that the SCD cannot be derived from SVD, the electronic signatures or any other data exported outside the TOE. OT.Sig\_SigF meets the requirement in paragraph 1(c) of Annex III by the requirements to ensure that the TOE provides the signature creation function for the legitimate signatory only and protects the SCD against the use of others. OT.DTBS\_Integrity\_TOE meets the requirements in paragraph 2 of Annex III as the TOE must not alter the DTBS/R. The usage of SCD under sole control of the signatory is ensured by OT.Lifecycle\_Security, OT.SCD/SVD\_Gen and OT.Sig\_SigF.

OE.Dev\_Prov\_Service ensures that the legitimate user obtains a TOE sample as an authentic, initialised and personalised TOE from an SSCD Provisioning Service through the TOE delivery procedure. If the TOE implements SCD generated under control of the SSCD Provisioning Service the legitimate user receives the TOE as SSCD. If the TOE is delivered to the legitimate user without SCD In the operational phase he or she applies for the (qualified) certificate as the Device holder and legitimate user of the TOE. The CSP will use the TOE security feature (addressed by the security objectives OT.TOE\_SSCD\_Auth and OT.TOE\_TC\_SVD\_Exp) to check whether the device presented is a SSCD linked to the applicant as required by OE.CGA\_SSCD\_Auth and the received SVD is sent by this SSCD as required by OE.CGA\_TC\_SVD\_Imp. Thus the obligation of the SSCD provision service for the first SCD/SVD pair is complemented in an appropriate way by the CSP for the SCD/SVD pair generated outside the secure preparation environment.

#### P.Sig\_Non-Repud (Non-repudiation of signatures)

#### [PP SSCD KI] & [PP SSCD KG] extended with part 5 and part 6

deals with the repudiation of signed data by the signatory, although the electronic signature is successfully verified with the SVD contained in their certificate valid at the time of signature creation. This policy is implemented by the combination of the security objectives for the TOE and its operational environment, which ensures the aspects of signatory's sole control over and responsibility for the electronic signatures created with the TOE. OE.SSCD\_Prov\_Service ensures that the signatory obtains an authentic copy of the TOE, initialised and personalised as SSCD from the SSCD-provisioning service. OE.CGA\_QCert ensures that the certificate allows to identify the signatory and thus to link the SVD to the signatory. OE.SVD\_Auth and OE.CGA\_QCert require the environment to ensure authenticity of the SVD as being exported by the TOE and used under sole control of the signatory. OT.SCD\_SVD\_Corresp (when SCD is generated off-TOE) ensures that the SVD exported by the TOE corresponds to the SCD that is implemented in the TOE. OT.SCD\_Unique (when SCD is generated on-TOE) or OE.SCD\_Unique (when SCD is generated off-TOE) provides that the signatory's SCD can practically occur just once.



OE. Signatory ensures that the signatory checks that the SCD, stored in the SSCD received from an SSCD provisioning service is in non-operational state (i.e. the SCD cannot be used before the signatory becomes into sole control over the SSCD). The TOE security feature addressed by the security objectives OT.TOE\_SSCD\_Auth and OT.TOE\_TC\_SVD\_Exp supported by OE.Dev\_Prov\_Service enables the verification whether the device presented by the applicant is a SSCD as required by OE.CGA\_SSCD\_Auth and the received SVD is sent by the device holding the corresponding SCD as required by OE.CGA\_TC\_SVD\_Imp. OT.Sigy\_SigF provides that only the signatory may use the TOE for signature creation. As prerequisite OE.Signatory ensures that the signatory keeps their VAD confidential. OE.DTBS Intend, OE.DTBS Protect and OT.DTBS Integrity TOE ensure that the TOE generates electronic signatures only for a DTBS/R that the signatory has decided to sign as DTBS. The robust cryptographic techniques required by OT.Sig Secure ensure that only this SCD may generate a valid electronic signature that can be successfully verified with the corresponding SVD used for signature verification. The security objective for the TOE OT.Lifecvcle Security (Lifecvcle security), OT.SCD Secrecy (Secrecy of the signature creation data), OT.EMSEC Design (Provide physical emanations security), OT.Tamper\_ID (Tamper detection) and OT.Tamper\_Resistance (Tamper resistance) protect the SCD against any compromise.

#### Dedicated to [PP SSCD KG] extended with part 4

deals with the repudiation of signed data by the signatory, although the electronic signature is successfully verified with the SVD contained in their certificate valid at the time of signature creation. This policy is implemented by the combination of the security objectives for the TOE and its operational environment, that ensure the aspects of signatory's sole control over and responsibility for the electronic signatures generated with the TOE. OE.Dev\_Prov\_Service ensures that the signatory uses an authentic TOE, initialised and personalised for the signatory. OE.CGA\_QCert ensures that the certificate allows to identify the signatory and thus to link the SVD to the signatory. OE.SVD\_Auth and OE.CGA\_QCert require the environment to ensure authenticity of the SVD as being exported by the TOE and used under sole control of the signatory. OT.SCD\_SVD\_Corresp ensures that the SVD exported by the TOE corresponds to the SCD that is implemented in the TOE. OT.SCD\_Unique provides that the signatory's SCD can practically occur just once.

OE.Signatory ensures that the signatory checks that the SCD, stored in the SSCD received from an SSCD provisioning service is in non-operational state (i.e. the SCD cannot be used before the signatory becomes into sole control over the SSCD). The TOE security feature addressed by the security objectives OT.TOE SSCD Auth and OT.TOE TC SVD Exp supported by OE.Dev Prov Service enables the verification whether the device presented by the applicant is a SSCD as required by OE.CGA SSCD Auth and the received SVD is sent by the device holding the corresponding SCD as required by OE.CGA\_TC\_SVD\_Imp. OT.Sigy\_SigF provides that only the signatory may use the TOE for signature creation. As prerequisite OE.Signatory ensures that the signatory keeps their VAD confidential. OE.DTBS\_Intend, OE.DTBS\_Protect and OT.DTBS\_Integrity\_TOE ensure that the TOE generates electronic signatures only for a DTBS/R that the signatory has decided to sign as DTBS. The robust cryptographic techniques required by OT.Sig Secure ensure that only this SCD may generate a valid electronic signature that can be successfully verified with the corresponding SVD used for signature verification. The security objective for the TOE OT.Lifecycle\_Security (Lifecycle security), OT.SCD\_Secrecy (Secrecy of the signature creation data), OT.EMSEC\_Design (Provide physical emanations security), OT.Tamper ID (Tamper detection) and OT.Tamper Resistance (Tamper resistance) protect the SCD against any compromise.

**P.Pre-personalisation** (*Strong authentication in pre-personalisation*) requests a strong authentication before accessing the SSCD. This is directly addressed by OT.Pre-personaliasation.

## 5.4.3 Assumptions

**A.SCA** (*Trustworthy signature creation application*) establishes the trustworthiness of the SCA with respect to generation of DTBS/R. This is addressed by OE.DTBS\_Intend (*Data intended to be signed*) which ensures that the SCA generates the DTBS/R of the data that have been presented to the signatory as DTBS and which the signatory intends to sign in a form which is appropriate for being signed by the TOE.

**A.CGA** (*Trustworthy certificate generation application*) establishes the protection of the authenticity of the signatory's name and the SVD in the qualified certificate by the advanced signature of the CSP by means of the CGA. This is addressed by OE.CGA\_QCert (Generation of qualified certificates), which ensures the generation of qualified certificates, and by OE.SVD\_Auth (Authenticity of the SVD), which ensures the



protection of the integrity of the received SVD and the verification of the correspondence between the SVD and the SCD that is implemented by the SSCD of the signatory.

**A.CSP** (*Secure SCD/SVD management by CSP*) establishes several security aspects concerning handling of SCD and SVD by the CSP. That the SCD/SVD generation device can only be used by authorized users is addressed by OE.SCD/SVD\_Auth\_Gen (Authorized SCD/SVD Generation), that the generated SCD is unique and cannot be derived by the SVD is addressed by OE.SCD\_Unique (Uniqueness of the signature creation data), that SCD and SVD correspond to each other is addressed by OE.SCD\_SVD\_Corresp (Correspondence between SVD and SCD), and that the SCD are kept confidential, are not used for signature generation in the environment and are deleted in the environment once exported to the TOE is addressed by OE.SCD\_Secrecy (SCD Secrecy).

This assumption is only applicable when SCD is generated off-card.

#### Assumptions coming from the Platform

**A.APPLET** This assumption is upheld by the security objective for the operational environment OE.APPLET which ensures that no applet loaded post-issuance shall contain native methods.

**A.VERIFICATION** This assumption is upheld by the security objective on the operational environment OE.VERIFICATION which guarantees that all the bytecodes shall be verified at least once, before the loading, before the installation or before the execution in order to ensure that each bytecode is valid at execution time.

This assumption is also upheld by the security objective of the environment OE.CODE-EVIDENCE which ensures that evidences exist that the application code has been verified and not changed after verification.



## 5.4.4 Compatibility between objectives of [ST-IAS] and [ST-PLTF]

## 5.4.4.1 <u>Compatibility between objectives for the TOE</u>

The following table lists the relevant security objectives of the Platform MultiApp V4.2 and provides the link to the security objectives related to the composite product, showing that there is no contradiction between the two.

Platform objective label	Platform objective short description (refer to [ST-PLTF] for the full description)	Link to the composite-product
O.SID	The TOE shall uniquely identify every subject (applet, or package) before granting it access to any service.	OT.SCD/SVD_Auth_Gen, OT.SCD_Auth_Imp, OT.TOE_SSCD_Auth
O.CIPHER	The TOE shall provide a means to cipher sensitive data for applications in a secure way	OT.TOE_TC_SVD_Exp, OT.Sig_Secure, OT.Sigy_SigF, OT.TOE_TC_VAD_Imp, TOE_TC_DTBS_Imp,
O.KEY-MNGT	The TOE shall provide a means to securely manage cryptographic keys. This concerns the correct generation, distribution, access and destruction of cryptographic keys.	OT.Lifecycle_Security, OT.SCD/SVD_Auth_Gen, OT.SCD_Unique, OT.SCD_SVD_Corresp, OT.SCD_Auth_Imp OT.SCD_Secrecy
O.REALLOCATION	The TOE shall ensure that the re-allocation of a memory block for the runtime areas of the Java Card VM does not disclose any information that was previously stored in that block.	OT.Lifecycle_Security, OT.SCD_Secrecy
O.GLOBAL_ARRAYS_IN TEG	The TOE shall ensure that no application can store a reference to the APDU buffer, a global byte array created by the user through makeGlobalArray method and the byte array used for invocation of the install method of the selected applet	No direct link with the composite product security objectives, but these platform security objectives are used to endure the security of the composite TOE.
O.GLOBAL_ARRAYS_C ONFID	The TOE shall ensure that the APDU buffer that is shared by all applications is always cleaned upon applet selection. The TOE shall ensure that the global byte array used for the invocation of the install method of the selected applet is always cleaned after the return from the install method.	
O.PIN-MNGT	The TOE shall provide a means to securely manage PIN objects.	OT.SCD/SVD_Auth_Gen, OT.SCD_Auth_Imp, OT.TOE_TC_VAD_Imp
O.OPERATE	The TOE must ensure continued correct operation of its security functions.	OT.Lifecycle_Security, OT.Tamper_ID, OT.Tamper_rsistance
O.ALARM	The TOE shall provide appropriate feedback information upon detection of a potential security violation	OT.Lifecycle_Security, OT.Tamper_ID, OT.Tamper_rsistance
O.OBJ-DELETION	The TOE shall ensure the object deletion shall not break references to objects.	OT.Lifecycle_Security
O.SCP. RECOVERY	The SCP shall support the TSFs of the TOE.	No direct link with the composite product security objectives, but this platform security objective is used to endure the security of the composite TOE.
O.SCP.IC	The SCP shall provide all IC security features against physical attacks	OT.Tamper_ID, OT.Tamper_Resistance
O.SCP.SUPPORT	The SCP shall support the TSFs of the TOE	OT.TOE_TC_VAD_Imp, OT.TOE_TC_DTBS_Imp, OE.SCD_Secrecy, OE.HID_TC_VAD_Exp, OE.SCA_TC_DTBS_Exp





O.SpecificAPI	The TOE shall provide to application a specific API means to optimize control on sensitive operations performed by application. TOE shall provide services for secure array management and to detect loss of data integrity and inconsistent execution flow and react against tearing or fault induction.	
---------------	--	--

#### Table 3: Compatibility with platform Security objectives

The other objectives (O.FIREWALL, O.NATIVE, O.RNG, O.LOAD, O.INSTALL, O.DELETION, O.TRANSACTION, O.RESOURCES, O.CARD-MANAGEMENT) of the platform are not relevant for this composite TOE or are directly handle by the Platform itself.

Platform PACE Module objective label	PACE Module Platform objective short description (refer to [ST-PLTF] for the full description)	Link to the composite-product
OT.Data_Integrity	The TOE must ensure integrity of the User Data and the TSF-data stored on it by protecting these data against unauthorised modification (physical manipulation and unauthorised modifying).The TOE must ensure integrity of the User Data and the TSF- data during their exchange between the TOE and the terminal connected	OT.DTBS_Integruty_TOE, OT.TOE_TC_SVD_Exp, OT.TOE_TC_VAD_Imp, OT.TOE_TC_DTBS_Imp, OE.HID_TC_VAD_Exp, OE.SCA_TC_DTBS_Exp
OT.Data_Authenticity	The TOE must ensure authenticity of the User Data and the TSF-data stored on it by enabling verification of their authenticity at the terminal-side .The TOE must ensure authenticity of the User Data and the TSF-data during their exchange between the TOE and the terminal connected	OE.HID_TC_VAD_Exp, OT.TOE_SSCD_Auth, OT.TOE_TC_VAD_Imp
OT.Data_Confidentiality	The TOE must ensure confidentiality of the User Data and the TSF data by granting read access only to the PACE authenticated BIS-PACE connected. The TOE must ensure confidentiality of the User Data and the TSF-data during their exchange between the TOE and the terminal connected	OE.HID_TC_VAD_Exp, OT.TOE_TC_VAD_Imp
OT.Identification	The TOE must provide means to store Initialisation and Pre-Personalisation Data in its non-volatile memory. The Initialisation Data must provide a unique identification of the IC during the manufacturing and the card issuing life cycle phases of the application data requiring PACE usage	No direct link with the composite product security objectives, but this platform security objective is used to endure the security of the composite TOE.
OT.AC_pers	Access Control for Personalisation of TOE and Applicative data	OT.Pre-perso_authentication
OT.Prot_Abuse_Func	The TOE must prevent that functions of the TOE, which may not be used in TOE operational phase, can be abused in order (i) to manipulate or to disclose the User Data stored in the TOE, (ii) to manipulate or to disclose the TSF-data stored in the TOE, (iii) to manipulate (bypass, deactivate or modify) soft-coded security functionality of the TOE	OT.Lifecycle_Security
OT.Prot_Inf_Leak	The TOE must provide protection against disclosure of confidential User Data or/and TSF-data stored and/or processed by the TOE	OT.EMSEC_Design, OT.Tamper_ID, OT.Tamper_Resistance, OT.Sig_Secure
OT.Prot_Phys_Tamper	The TOE must provide protection of confidentiality and integrity of the User Data, the TSF-data and the TOE's Embedded Software	OT.EMSEC_Design, OT.Tamper_ID, OT.Tamper_Resistance
OT.Prot_Malfunction	The TOE must ensure its correct operation. The TOE must prevent its operation outside the normal operating conditions where reliability and secure operation have not been proven or tested. This is to prevent functional errors in the TOE	OT.EMSEC_Design, OT.Tamper_ID, OT.Tamper_Resistance



#### Table 4: Compatibility with platform PACE Security objectives

We can therefore conclude that the objectives for the TOE of [ST-IAS] and [ST-PLTF] are consistent.

### 5.4.4.2 <u>Compatibility between objectives for the environment</u>

OE.SVD\_Auth, OE.CGA\_QCert, OE.SSCD\_Prov\_Service, OE.HID\_VAD, OE.DTBS\_Intend, OE.DTBS\_Protect, OE.Signatory, OE.SCD/SCD\_Auth\_Gen, OE.SCD\_Secrecy, OE.SCD\_Unique, OE.Dev\_Prov\_Service,, OE.CGA\_SSCD\_Auth, OE.CGA\_TC\_SVD\_Imp and OE.SCD\_SVD\_Corresp, OE.HID\_TC\_VAD\_Exp, OE.SCA\_TC\_DTBS\_Exp are objectives specific to [ST-IAS] and they do no conflict with the objectives of [ST-PLTF].

We can therefore conclude that the objectives for the environment of [ST-IAS] and [ST-PLTF] are consistent.

## 5.4.5 Justifications for adding & substitution objectives on the environment

#### 5.4.5.1 Additions to [PP-SSCD-KG]

The only additional objectives on the environment are: OE.SCD/SCD\_Auth\_Gen, OE.SCD\_Secrecy, OE\_SCD\_Unique, OE.SCD\_SVD\_Corresp. These objectives request the environment to perform several operations when the SCD is generated off-TOE and imported afterwards. These two operations are outside the scope of [PP-SSCD-KG]. Therefore the added objectives on the environment do not weaken the TOE.

## 5.4.5.2 Additions to [PP-SSCD-KI]

(who Additional objectives the environment are: OE.Dev Prov Service, replace on OE.CGA SSCD Auth. OE.CGA\_TC\_SVD\_Imp, OE.SSCD Prov Service), and trusted link to communication with certificate generation application.

This is outside the scope of [PP-SSCD-KI]. Therefore the added objectives on the environment do not weaken the TOE

### 5.4.5.3 Substitution

Part 5 and part 6 substitute OE.HI\_VAD from the core PP by OE.HID\_TC\_VAD\_Exp and OE.DTBS\_Protect from the core PP by OE.SCA\_TC\_DTBS\_Exp. These do not weaken the TOE.



## 6. EXTENDED COMPONENTS DEFINITION

This ST uses two components defined as extensions to CC part 2:

- FPT\_EMS.1 which is defined in [PP-SSCD-KG] and [PP-SSCD-KI].
- FIA\_API.1 which is defined in [EN-419211-4].

### 6.1 DEFINITION OF THE FAMILY FPT\_EMS

The sensitive family FPT\_EMS (TOE Emanation) of the Class FPT (Protection of the TSF) is defined here to describe the IT security functional requirements of the TOE. The TOE shall prevent attacks against the TOE and other secret data where the attack is based on external observable physical phenomena of the TOE. Examples of such attacks are evaluation of TOE's electromagnetic radiation, simple power analysis (SPA), differential power analysis (DPA), timing attacks, etc. This family describes the functional requirements for the limitation of intelligible emanations which are not directly addressed by any other component of CC part 2 [CC-2].

The family "TOE Emanation (FPT\_EMS)" is specified as follows.

#### Family behaviour

This family defines requirements to mitigate intelligible emanations.

Component levelling:

FPT\_EMS TOE emanation 1

FPT\_EMS.1 TOE emanation has two constituents:

FPT\_EMS.1.1 Limit of Emissions requires to not emit intelligible emissions enabling access to TSF data or user data.

FPT\_EMS.1.2 Interface Emanation requires to not emit interface emanation enabling access to TSF data or user data.

Management:	FPT_EMS.1 There are no management activities foreseen.
Audit <sup>.</sup>	FPT_FMS 1

There are no actions defined to be auditable.

#### **FPT\_EMS.1 TOE Emanation**

- Hierarchical to: No other components
- Dependencies: No dependencies.
- FPT\_EMS.1.1 The TOE shall not emit [assignment: *types of emissions*] in excess of [assignment: *specified limits*] enabling access to [assignment: *list of types of TSF data*] and [assignment: *list of types of user data*].
- FPT\_EMS.1.2 The TSF shall ensure [assignment: *type of users*] are unable to use the following interface [assignment: *type of connection*] to gain access to [assignment: *list of types of TSF data*] and [assignment: *list of types of user data*].

#### 6.2 DEFINITION OF THE FAMILY FIA\_API

To describe the IT security functional requirements of the TOE a sensitive family (FIA\_API) of the Class FIA (Identification and authentication) is defined here. This family describes the functional requirements for the





proof of the claimed identity for the authentication verification by an external entity where the other families of the class FIA address the verification of the identity of an external entity.

FIA\_API Authentication Proof of Identity

Family behaviour

This family defines functions provided by the TOE to prove their identity and to be verified by an external entity in the TOE IT environment.

Component levelling:



FIA\_API.1 Authentication Proof of Identity:

Management: FIA\_API.1 The following actions could be considered for the management functions in FMT: Management of authentication information used to prove the claimed identity. activities foreseen.

Audit: There are no actions defined to be auditable.

#### FIA\_API.1 Authentication Proof of Identity

Hierarchical to: No other components

Dependencies: No dependencies.

FIA\_API.1.1 The TSF shall provide a [assignment: *authentication mechanism*] to prove the identity of the [assignment: *authorized user or role*].

## 7. SECURITY REQUIREMENTS

#### 7.1 SECURITY FUNCTIONAL REQUIREMENTS FOR THE TOE

This chapter defines the security functional requirements for the TOE using functional requirements components as specified in [PP-SSCD-KI], [PP-SSCD-KG]

and [EN-419211-4] adding an operation of FIA\_UAU.1 and adding SFRs: FIA\_API.1, FDP\_DAU.2/SVD, FTP\_ITC.1/SVD.

and [EN-419211-5] & [EN-419211-6] adding an operation of FIA\_UAU.1 and adding SFRs: FDP\_UIT.1/DTBS, FTP\_ITC.1/VAD and FTP\_ITC.1/DTBS

[ST-PLTF] deals with the security functional requirements of [PP-JCS-Open].

Refinements in this section are underlined when they are PP refinements and in bold characters when they are additional ones.

For this section, a presentation choice has been selected. Each SFR present a table with different type of algorithms treated. For each case, there is no distinction regarding the technical objectives fulfilled by each row on the table (thus algorithm family). The technical objectives are the same disregarding this differentiation.

### 7.1.1 Class Cryptographic Support (FCS)

#### FCS\_CKM.1/SCD Cryptographic key generation for SCD/SVD pair

Hierarchical to: No other components



Dependencies: [FCS\_CKM.2 Cryptographic key distribution or FCS\_COP.1 Cryptographic operation] FCS\_CKM.4 Cryptographic key destruction

FCS\_CKM.1.1The TSF shall generate SCD/SVD pair in accordance with a specified cryptographic key<br/>generation algorithm [assignment: cryptographic key generation algorithm] and<br/>specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the<br/>following: [assignment: list of standards].

Algorithm type	algorithm	Key size	standards
/RSA	RSA CRT key generation	1024,1536,2048,4096	ANSI X9.31
/ECC	ECC key generation	160,192,224,256,320,384,512,521	ANSI X9.62

Table 5: FCS\_CKM.1/SCD iteration explanation

Application note: part 2 only [PP-SSCD-KG].

Application note:

FCS\_CKM.1/SCD is named FCS\_CKM.1 in [PP-SSCD-KG]. This naming clarified the purpose of the SFR and allows for the introduction of FCS\_CKM.1/SCD.

#### FCS\_CKM.1/Session Cryptographic key generation for session keys

Hierarchical to: No other components

Dependencies: [FCS\_CKM.2 Cryptographic key distribution or FCS\_COP.1 Cryptographic operation] FCS\_CKM.4 Cryptographic key destruction

FCS\_CKM.1.1 The TSF shall generate cryptographic keys in accordance with a specified cryptographic key generation algorithm [assignment: cryptographic key generation algorithm] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].

Algorithm type	algorithm	Key size	standards
/TDES	TDES session key generation	112	[ISO7816], [PKCS#3] DH.
/AES	AES session key generation	128, 192, 256	[ISO7816], [PKCS#3] DH, [IEEE-P1363] ECDH, [IEEE-P1363] ECDHC

 Table 6: FCS\_CKM.1/Session iteration explanation





#### FCS\_CKM.4/SCD Cryptographic key destruction

Hierarchical to: No other components Dependencies: [FDP\_ITC.1 Import of user data without security attributes, or FDP\_ITC.2 Import of user data with security attributes, or FCS CKM.1 Cryptographic key generation]

FCS\_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method: **method from the underlying platform** that meets the following: **No standard** 

Algorithm type	when
/RSA	new SCD generation or import /signer's will
/ECC	new SCD generation or import /signer's will

Table 7: FCS\_CKM.4 iteration explanation

Application note: part 2 only [PP-SSCD-KG].

Application note:

FCS\_CKM.4/SCD is named FCS\_CKM.4 in [PP-SSCD-KG]. This naming clarified the purpose of the SFR and allows for the introduction of FCS\_CKM.4/SCD.

#### FCS\_CKM.4/Session Cryptographic key destruction

Hierarchical to: No other components

Dependencies: [FDP\_ITC.1 Import of user data without security attributes, or FDP\_ITC.2 Import of user data with security attributes, or FCS\_CKM.1 Cryptographic key generation]

FCS\_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method: **method from the underlying platform** that meets the following: **No standard**.

Algorithm type	when
/TDES	End of session
/AES	End of session

Table 8: FCS\_CKM.4/Session iteration explanation

#### FCS\_COP.1/DSC Cryptographic operation – Digital Signature Creation

 Hierarchical to:
 No other components

 Dependencies:
 [FDP\_ITC.1 Import of user data without security attributes, or

 FDP\_ITC.2 Import of user data with security attributes, or

 FCS\_CKM.1 Cryptographic key generation]

 FCS\_CKM.4 Cryptographic key destruction

FCS\_COP.1.1 The TSF shall perform <u>digital signature creation</u> in accordance with a specified cryptographic algorithm [assignment: cryptographic algorithm] and cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].





Algorithm type	operation	algorithm	key size	standards
/DSC-RSA	signature	RSA CRT	1024, 1536, 2048, 3072, and 4096	[ISO9796-2] RSA SHA PKCS#1 v1.5 RSA PSS SHA PKCS#1
/DSC-ECC	signature	ECC	224, 256, 384, 512, and 521	[TR-03111] ECDSA SHA

Table 9: FCS\_COP.1/DSC iteration explanation

Application note: part 2 only [PP-SSCD-KG].

Application note:

FCS\_COP.1/DSC is named FCS\_COP.1 in [PP-SSCD-KG]. This naming clarified the purpose of the SFR and allows for the introduction of FCS\_COP.1/DSC.

#### FCS\_COP.1/Session Cryptographic operation – Other operations

Hierarchical to:No other componentsDependencies:[FDP\_ITC.1 Import of user data without security attributes, or<br/>FDP\_ITC.2 Import of user data with security attributes, or<br/>FCS\_CKM.1 Cryptographic key generation]<br/>FCS\_CKM.4 Cryptographic key destruction

FCS\_COP.1.1 The TSF shall perform [assignment: cryptographic operations] in accordance with a specified cryptographic algorithm [assignment: cryptographic algorithm] and cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].

Algorithm type	operation	algorithm	key size	standards
/ENC-TDES	Encryption & decryption	TDES	112	[SP800-67]
/ENC-AES	Encryption & decryption	AES	128, 192, 256	[FIPS197] AES 128 NOPAD
/MAC-TDES	MAC computation & Verification	TDES	112	[SP800-67] [ISO9797-1] DES MAC ISO9797-1 M2
/MAC-AES	MAC computation & Verification	AES	128,192, 256	[FIPS197] AES 128 NOPAD

Table 10: FCS\_COP.1/Session 'Other operations' iteration explanation





## 7.1.2 Class FDP User Data Protection

The security attributes and related status for the subjects and objects are:

Subject or object the security attribute is associated with	Security attribute type	Value of the security attribute
S.User	Role	R.Admin - S.User acts as S.Admin R.Sigy - S.User acts as S.Sigy
S.User	SCD / SVD Management	Authorised, not authorised
SCD	SCD Operational	No, yes
SCD	SCD identifier	arbitrary value
SVD	No security attribute	NA

#### Table 11: Subjects and security attributes for access control

#### FDP\_ACC.1/Signature\_Creation Subset access control

 Hierarchical to:
 No other components

 Dependencies:
 FDP\_ACF.1 Security attribute based access control

 FDP\_ACC.1.1
 The TSF shall enforce the Signature Creation SFP to objects based on the following:

 /Signature\_Creation
 1. Subjects: S.User,

 2. Objects: DTBS/R, SCD
 3. Operations: signature creation.

#### FDP\_ACF.1/Signature\_Creation Security attribute based access control

Dependencies: FD	o other components DP_ACC.1 Subset access control IT_MSA.3 Static attribute initialization
FDP_ACF.1.1 /Signature_Creation	<ul> <li>The TSF shall enforce the <u>Signature Creation SFP</u> to objects based on the following:</li> <li>the user S.User is associated with the security attribute "Role" and.</li> <li>the SCD with the security attribute "SCD Operational"</li> </ul>
FDP_ACF.1.2 /Signature_Creation	The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: <u>R.Sigy is allowed to create electronic signatures for DTBS/R with SCD which security attribute "SCD operational" is set to "yes",</u>
FDP_ACF.1.3 /Signature_Creation	The TSF shall explicitly authorize access of subjects to objects based on the following additional rules: <u>none</u> .
FDP_ACF.1.4 /Signature_Creation	The TSF shall explicitly deny access of subjects to objects based on the following additional rules: S.User is not allowed to create electronic signatures for DTBS/R with SCD which security attribute "SCD operational" is set to "no".





#### FDP\_ACC.1/SCD/SVD\_Generation Subset access control

	o other components DP_ACF.1 Security attribute based access control
FDP_ACC.1.1 /SCD/SVD_Generation	<ul> <li>The TSF shall enforce the <u>SCD/SVD Generation SFP</u> to objects based on the following:</li> <li>1. <u>Subjects: S.User,</u></li> <li>2. <u>Objects: SCD, SVD</u></li> <li>3. <u>Operations: generation of SCD/SVD pair.</u></li> </ul>
Application note: part	2 only [PP-SSCD-KG].
FDP_ACF.1/SCD/SV	D_Generation Security attribute based access control
Dependencies: FD	o other components DP_ACC.1 Subset access control /IT_MSA.3 Static attribute initialization
FDP_ACF.1.1 /SCD/SVD_Generation	The TSF shall enforce the <u>SCD/SVD Generation SFP</u> to objects based on the following: <u>the user S.User is associated with the security attribute "SCD/SVD Management"</u> .
FDP_ACF.1.2 /SCD/SVD_Generation	The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: <u>S.User with the security attribute "SCD/SVD Management" set to "authorized" is allowed to generate SCD/SVD pair,</u>
FDP_ACF.1.3 /SCD/SVD_Generation	The TSF shall explicitly authorize access of subjects to objects based on the following additional rules: <u>none</u> .
FDP_ACF.1.4 /SCD/SVD_Generation	The TSF shall explicitly deny access of subjects to objects based on the following additional rules: <u>S.User with the security attribute "SCD/SVD management" set to "not authorised" is</u> not allowed to generate SCD/SVD pair.

Application note: part 2 only [PP-SSCD-KG].

#### FDP\_ACC.1/SVD\_Transfer Subset access control

Hierarchical to:	No other components
Dependencies:	FDP_ACF.1 Security attribute based access control

 FDP\_ACC.1.1
 The TSF shall enforce the <u>SVD Transfer SFP</u> to objects based on the following:

 /SVD\_Transfer
 1.
 <u>Subjects: S.User</u>,

 2.
 <u>Objects: SVD</u>

3. Operations: export.

Application note: part 2 only [PP-SSCD-KG].

#### FDP\_ACF.1/SVD\_Transfer Security attribute based access control

Hierarchical to: Dependencies:	No other components FDP_ACC.1 Subset access control FMT_MSA.3 Static attribute initialization
FDP_ACF.1.1 /SVD_Transfer	<ul> <li>The TSF shall enforce the <u>SVD Transfer SFP</u> to objects based on the following:</li> <li><u>the S.User is associated with the security attribute Role</u></li> <li><u>the SVD</u>.</li> </ul>





FDP\_ACF.1.2 The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: R.Admin or R.Sigy is allowed to export SVD,

FDP\_ACF.1.3 The TSF shall explicitly authorize access of subjects to objects based on the following /SVD\_Transfer additional rules: <u>none</u>.

FDP\_ACF.1.4 The TSF shall explicitly deny access of subjects to objects based on the following additional /SVD\_Transfer rules: <u>none</u>

Application note: part 2 only [PP-SSCD-KG].

#### FDP\_ACC.1/SCD\_Import Subset access control

Hierarchical to:	No other components
Dependencies:	FDP_ACF.1 Security attribute based access control
FDP_ACC.1.1 /SCD_Import	<ul> <li>The TSF shall enforce the <u>SCD Import SFP</u> to objects based on the following:</li> <li><u>Subjects: S.User</u>,</li> <li><u>Objects: SCD</u></li> <li><u>Operations: import of SCD</u>.</li> </ul>

Application note: part 3 only [PP-SSCD-KI].

The TOE shall meet the requirement "Security attribute based access control (FDP\_ACF.1)" as specified below (Common Criteria Part 2).

#### FDP\_ACF.1/SCD\_Import Security attribute based access control

Hierarchical to: Dependencies:	No other components FDP_ACC.1 Subset access control FMT_MSA.3 Static attribute initialization
FDP_ACF.1.1 /SCD_Import	The TSF shall enforce the <u>SCD Import SFP</u> to objects based on the following: the S.User is associated with the security attribute "SCD/SVD Management".
FDP_ACF.1.2 /SCD_Import	The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: S.User with the security attribute "SCD/SVD Management" set to "authorised" is allowed to import SCD.
FDP_ACF.1.3 /SCD_Import	The TSF shall explicitly authorize access of subjects to objects based on the following additional rules: <u>none</u> .
FDP_ACF.1.4 /SCD_Import	The TSF shall explicitly deny access of subjects to objects based on the following additional rules: <u>S.User with the security attribute "SCD/SVD management" set to "not authorised" is not allowed to import SCD.</u>

Application note: part 3 only [PP-SSCD-KI].





#### FDP\_DAU.2/SVD\_ Data Authentication with Identity of Guarantor

Hierarchical to: Dependencies:	FDP_DAU.1 Basic Data Authentication FIA_UID.1 Timing of identification
FDP_DAU.2.1 /SVD	The TSF shall provide a capability to generate evidence that can be used as a guarantee of the validity of <u>SVD.</u>
FDP_DAU.2.2 /SVD	The TSF shall provide <u>CGA</u> with the ability to verify evidence of the validity of the indicated information and the identity of the user that generated the evidence.

Application note: Part 4 extension [EN-419211-4] related to core PP key generation [PP-SSCD-KG]..

#### FDP\_ITC.1/SCD Import of user data without security attributes

Hierarchical to: Dependencies:	No other components [FDP_ACC.1 Subset access control, or FDP_IFC.1 Subset information flow control] FMT_MSA.3 Static attribute initialization
FDP_ITC.1.1 /SCD	The TSF shall enforce the <u>SCD Import SFP</u> when importing user data, controlled under the SFP, from outside of the TOE.
FDP_ITC.1.2 /SCD	The TSF shall ignore any security attributes associated with the <u>SCD</u> when imported from outside the TOE.
FDP_ITC.1.3 /SCD	The TSF shall enforce the following rules when importing user data controlled under the SFP from outside the TOE: <b>none</b> .

Application note: part 3 only [PP-SSCD-KI].

#### FDP\_RIP.1 Subset residual information protection

- Hierarchical to: No other components Dependencies: No dependency
- FDP\_RIP.1.1 The TSF shall ensure that any previous information content of a resource is made unavailable upon the de-allocation of the resource from the following objects: SCD,

The following data persistently stored by TOE have the user data attribute "integrity checked persistent stored data":

1. SCD

2. SVD (if persistent stored by TOE).

The DTBS/R temporarily stored by TOE has the user data attribute "integrity checked stored data":

#### FDP\_SDI.2/Persistent Stored data integrity monitoring and action

Hierarchical to: Dependencies:	FDP_SDI.1 No dependency
FDP_SDI.2.1 /Persistent	The TSF shall monitor user data stored in containers controlled by the TSF for integrity error on all objects, based on the following attributes: integrity checked persistent stored data.
FDP_SDI.2.2 /Persistent	Upon detection of a data integrity error, the TSF shall : <u>1. prohibit the use of the altered data</u>





2. inform the S.Sigy about integrity error.

#### FDP\_SDI.2/DTBS Stored data integrity monitoring and action

Hierarchical to: Dependencies:	FDP_SDI.1 No dependency
FDP_SDI.2.1 /DTBS	The TSF shall monitor user data stored in containers controlled by the TSF for <u>integrity error</u> on all objects, based on the following attributes: <u>integrity checked stored DTBS</u> .
FDP_SDI.2.2 /DTBS	Upon detection of a data integrity error, the TSF shall : <u>1. prohibit the use of the altered data</u> <u>2. inform the S.Sigy about integrity error</u> .

#### FDP\_UCT.1/SCD Basic data exchange confidentiality

Hierarchical to:	No other components
Dependencies:	[FDP_ACC.1 Subset access control, or
·	FDP_IFC.1 Subset information flow control]
	[FTP_ITC.1 Inter-TSF trusted channel, or
	FTP_TRP.1 Trusted path]
	· -

FDP\_UCT.1.1 The TSF shall enforce the <u>SCD Import SFP</u> to <u>receive</u> **SCD** in a manner protected from unauthorized disclosure.

Application note: part 3 only [PP-SSCD-KI].

#### FDP\_UIT.1/DTBS Inter-TSF trusted channel – TC Human Interface Device

Hierarchical to: No other components Dependencies: [FDP\_ACC.1 Subset access control, or FDP\_IFC.1 Subset information flow control] [FTP\_ITC.1 Inter-TSF trusted channel, or FTP\_TRP.1 Trusted path]

# FDP\_UIT.1.1 The TSF shall enforce the <u>Signature Creation SFP</u> to <u>receive</u> user data in a manner protected from <u>modification and insertion</u> errors.

FDP\_UIT.1.2 The TSF shall be able to determine on receipt of user data, whether <u>modification and</u> <u>insertion</u> has occurred.

Application note: Part 5 extension [EN-419211-5] related to core PP key generation [PP-SSCD-KG] and Part 6 extension [EN-419211-6] related to core PP key importation [PP-SSCD-KI].



## 7.1.3 Class FIA Identification and Authentication

#### FIA\_AFL.1/SIG Authentication failure handling

- Hierarchical to: No other components
- Dependencies: FIA\_UAU.1 Timing of authentication

FIA\_AFL.1.1 The TSF shall detect when **[3]** unsuccessful authentication attempts occur related to <u>consecutive failed authentication attempts</u>.

FIA\_AFL.1.2 When the defined number of unsuccessful authentication attempts has been <u>met</u>, the TSF shall <u>block RAD</u>.

Note: PIN or BioPIN could be used for user authentication.

# FIA\_AFL.1/PERSO Authentication failure handling during pre-personalization and personalization phases

Hierarchical to: Dependencies:	No other components FIA_UAU.1 Timing of authentication
FIA_AFL.1.1 /PERSO	The TSF shall detect when [Number in Table 12] unsuccessful authentication attempts occurs related to authentication attempts.
FIA_AFL.1.2 /PERSO	When the defined number of unsuccessful authentication attempts has been met, the TSF shall block key.

Auth type	Number	Actions
GP	3	Block GP authentication.

#### Table 12: FIA\_AFL.1/PERSO refinements

#### FIA\_API.1 Authentication Proof of Identity

Hierarchical to: No other components Dependencies: No dependencies.

FIA\_API.1.1 The TSF shall provide a **mutual authentication** to prove the identity of the <u>SSCD</u>.

Application note: Part 4 extension [EN-419211-4] related to core PP key generation [PP-SSCD-KG].

#### FIA\_UAU.1/PERSO Timing of authentication

Hierarchical to: Dependencies:	No other components FIA_UID.1 Timing of identification
FIA_UAU.1.1 /PERSO	<ol> <li>The TSF shall allow</li> <li>Identification of the user by means of TSF required by FIA_UID.1.</li> <li>No other action.</li> <li>on behalf of the user to be performed before the user is authenticated.</li> </ol>
FIA_UAU.1.2 /PERSO	The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

Application note:



In pre-personalisation, the TSF shall allow no action to be performed before user is authenticated.

#### FIA\_UAU.1/SIG Timing of authentication

- Hierarchical to: No other components Dependencies: FIA\_UID.1 Timing of identification
- FIA UAU.1.1 The TSF shall allow
- /SIG
- 1. Self test according to FPT TST.1.
  - 2. Identification of the user by means of TSF required by FIA UID.1.
  - establishing a trusted channel between the CGA and the TOE by means of TSF 3 required by FTP ITC.1/SVD
  - 4. establishing a trusted channel between the HID and the TOE by means of TSF required by FTP\_ITC.1/VAD
  - 5. None.

on behalf of the user to be performed before the user is authenticated.

FIA UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other /SIG TSF-mediated actions on behalf of that user.

#### Application note:

The TSF shall allow no Signature generation related action to be performed before user is authenticated. That means that other actions, not specifically related to the Signature creation, may be performed before user is authenticated.

Application note: Part 4 extension [EN-419211-4], Part 5 extension [EN-419211-5] and Part 6 extension [EN-419211-6] add operations on FIA-UAU.1/SIG.

#### FIA UID.1/PERSO Timing of identification

Hierard	chica	al to:	No	other	com	ponents
-						

- Dependencies: No dependencies
- FIA\_UID.1.1 The TSF shall allow
- 1. No action. /PERSO

on behalf of the user to be performed before the user is identified.

FIA UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-/PERSO mediated actions on behalf of that user.

#### FIA UID.1/SIG Timing of identification

- Hierarchical to: No other components Dependencies: No dependencies
- The TSF shall allow FIA UID.1.1 /SIG
  - 1. Self test according to FPT\_TST.1.
    - 2. No other Signature generation related action.

on behalf of the user to be performed before the user is identified.

FIA UID.1.2 The TSF shall require each user to be successfully identified before allowing any other TSF-/SIG mediated actions on behalf of that user.

### 7.1.4 Class FMT Security Management

#### FMT\_MOF.1 Management of security functions behaviour



Hierarchical to:	No other components
Dependencies:	FMT_SMR.1 Security roles.
	FMT_SMF.1 Specification of Management functions

FMT\_MOF.1.1 The TSF shall restrict the ability to enable the signature-creation function to R.Sigy.

#### FMT\_MSA.1/Signatory Management of security attributes

No other components
[FDP_ACC.1 Subset access control, or
FDP_IFC.1 Subset information flow control]
FMT_SMR.1 Security roles
FMT_SMF.1 Specification of Management functions

FMT\_MSA.1.1 The TSF shall enforce the <u>Signature-creation SFP</u> to restrict the ability to <u>modify</u> the security attributes <u>SCD operational</u> to <u>R.Sigy</u>.

#### FMT\_MSA.1/AdminKG Management of security attributes

Hierarchical to:	No other components
Dependencies:	[FDP_ACC.1 Subset access control, or
	FDP_IFC.1 Subset information flow control]
	FMT_SMR.1 Security roles
	FMT_SMF.1 Specification of Management functions

FMT\_MSA.1.1 The TSF shall enforce the <u>SCD/SVD\_Generation\_SFP</u> to restrict the ability to <u>modify</u> the security attributes <u>SCD / SVD management</u> to <u>R.Admin</u>.

Application note: part 2 only [PP-SSCD-KG].

#### FMT\_MSA.1/AdminKI Management of security attributes

Hierarchical to:	No other components
Dependencies:	[FDP_ACC.1 Subset access control, or
	FDP_IFC.1 Subset information flow control]
	FMT_SMR.1 Security roles
	FMT_SMF.1 Specification of Management functions

FMT\_MSA.1.1 The TSF shall enforce the <u>SCD\_Import\_SFP</u> to restrict the ability to <u>modify</u> the security attributes <u>SCD / SVD management</u> to <u>R.Admin</u>.

Application note: part 3 only [PP-SSCD-KI].

#### FMT\_MSA.2 Secure security attributes

 Hierarchical to:
 No other components

 Dependencies:
 [FDP\_ACC.1 Subset access control, or

 FDP\_IFC.1 Subset information flow control]

 FMT\_MSA.1 Management of security attributes

 FMT\_SMR.1 Security roles

FMT\_MSA.2.1 The TSF shall ensure that only secure values are accepted for <u>SCD / SVD Management</u> and <u>SCD operational.</u>

#### FMT\_MSA.3/Keygen Static attribute initialization





Hierarchical to:	No other components
Dependencies:	FMT_MSA.1 Management of security attributes FMT_SMR.1 Security roles

FMT\_MSA.3.1 The TSF shall enforce the <u>SCD/SVD\_Generation\_SFP</u>, <u>SVD\_Transfer\_SFP</u> and <u>Signature-</u> /Keygen <u>creation\_SFP</u> to provide <u>restrictive</u> default values for security attributes that are used to enforce the SFP.

FMT\_MSA.3.2 The TSF shall allow the <u>R.Admin</u> to specify alternative initial values to override the default values when an object or information is created.

Application note: part 2 only [PP-SSCD-KG].

#### FMT\_MSA.3/KeyImport Static attribute initialization

Hierarchical to: Dependencies:	No other components FMT_MSA.1 Management of security attributes FMT_SMR.1 Security roles
FMT_MSA.3.1 /KeyImport	The TSF shall enforce the <u>SCD_Import_SFP</u> and <u>Signature-creation_SFP</u> to provide <u>restrictive</u> default values for security attributes that are used to enforce the SFP.
FMT_MSA.3.2 /KeyImport	The TSF shall allow the <u>R.Admin</u> to specify alternative initial values to override the default values when an object or information is created.

Application note: part 3 only [PP-SSCD-KI].

#### FMT\_MSA.4/Keygen Static attribute value inheritance

- Hierarchical to: No other components
- Dependencies: [FDP\_ACC.1 Subset access control, or

FDP\_IFC.1 Subset information flow control]

- FMT\_MSA.4.1 The TSF shall use the following rules to set the value of security attributes:
  - 1. <u>If S.Admin successfully generates an SCD/SVD pair without S.Sigy being authenticated</u> the security attribute "SCD operational of the SCD" shall be set to "no" as a single operation.
    - 2. <u>If S.Sigy successfully generates an SCD/SVD pair the security attribute "SCD operational of the SCD" shall be set to "yes" as a single operation.</u>

Application note: part 2 only [PP-SSCD-KG].

/Keygen



/KeyImport



#### FMT\_MSA.4/KeyImport Static attribute value inheritance

Hierarchical to:	No other components
Dependencies:	[FDP_ACC.1 Subset access control, or
	FDP_IFC.1 Subset information flow control]

FMT\_MSA.4.1 The TSF shall use the following rules to set the value of security attributes:

- 1. <u>If S.Admin imports SCD while S.Sigy is not currently authenticated, the security attribute</u> <u>"SCD operational" of the SCD shall be set to "no" after import of the SCD as a single operation.</u>
- If S.Admin imports SCD while the S.Sigy is currently authenticated, the security attribute <u>"SCD operational" of the SCD shall be set to "yes" after import of the SCD as a single</u> <u>operation.</u>

Application note: part 3 only [PP-SSCD-KI].

#### FMT\_MTD.1/Admin Management of TSF data

Hierarchical to:	No other components
Dependencies:	FMT_SMR.1 Security roles
	FMT_SMF.1 Specification of management functions

FMT\_MTD.1.1 The TSF shall restrict the ability to <u>create</u> the <u>RAD</u> to <u>R.Admin</u>. /Admin

#### FMT\_MTD.1/Signatory Management of TSF data

No other components
FMT_SMR.1 Security roles
FMT_SMF.1 Specification of management functions

FMT\_MTD.1.1 The TSF shall restrict the ability to <u>modify</u> the <u>RAD</u> to <u>S.Sigy</u>. /Signatory

#### FMT\_SMF.1 Specification of management functions

- Hierarchical to: No other components
- Dependencies: No dependencies

FMT\_SMF.1.1 The TSF shall be capable of performing the following security management functions:

- 1. Creation and modification of RAD.
- 2. Enabling the signature-creation function.
- 3. Modification of the security attribute SCD/SVD management, SCD operational.
- 4. Change the default value of the security attribute SCD Identifier.
- 5. No other security management function.

#### FMT\_SMR.1 Security roles

- Hierarchical to: No other components
- Dependencies: FIA\_UID.1 Timing of identification
- FMT\_SMR.1.1 The TSF shall maintain the roles <u>R.Admin and R.Sigy</u>
- FMT\_SMR.1.2 The TSF shall be able to associate users with roles.





### 7.1.5 Class FPT Protection of the Security Functions

#### **FPT\_EMS.1 TOE Emanation**

- Hierarchical to: No other components
- Dependencies: No dependencies
- FPT\_EMS.1.1 The TOE shall not emit [electromagnetic and current emissions] in excess of [intelligible threshold] enabling access to RAD and SCD.
- FPT\_EMS.1.2 The TSF shall ensure **[unauthorized users]** are unable to use the following interface: **smart card circuit contacts** to gain access to <u>RAD and SCD</u>.

#### FPT\_FLS.1 Failure with preservation of secure state

- Hierarchical to: No other components
- Dependencies: No dependencies
- FPT\_FLS.1.1
   The TSF shall preserve a secure state when the following types of failures occur:

   1.
   self-test according to FPT\_TST fails.
  - 2. [No other failure].

#### FPT\_PHP.1 Passive detection of physical attack

- Hierarchical to: No other components
- Dependencies: No dependencies
- FPT\_PHP.1.1 The TSF shall provide unambiguous detection of physical tampering that might compromise the TSF.
- FPT\_PHP.1.2 The TSF shall provide the capability to determine whether physical tampering with the TSF's devices or TSF's elements has occurred.

#### FPT\_PHP.3 Resistance to physical attack

- Hierarchical to: No other components Dependencies: No dependencies
- FPT\_PHP.3.1 The TSF shall resist [clock frequency, voltage tampering and penetration of protection layer] to the [integrated circuit] by responding automatically such that the SFRs are always enforced.

#### FPT\_TST.1 TSF testing

- Hierarchical to:No other componentsDependencies:No dependencies
- FPT\_TST.1.1 The TSF shall run a suite of self tests [see Table 13: conditions triggering tests] to demonstrate the correct operation of <u>the TSF</u>.
- FPT\_TST.1.2 The TSF shall provide authorized users with the capability to verify the integrity of <u>TSF data</u>.
- FPT\_TST.1.3 The TSF shall provide authorized users with the capability to verify the integrity of <u>TSF</u>.





During initial start-up	RNG live test, sensor test, FA detection, Integrity Check of NVM ES
Periodically	RNG monitoring, sensor test, FA detection
After cryptographic computation	FA detection
Before any use or update of TSF data	FA detection, Integrity Check of related TSF data

#### Table 13: conditions triggering tests

## 7.1.6 Class FTP Trusted Path/Channel

#### FTP\_ITC.1/SCD import Inter-TSF trusted Channel

- Hierarchical to: No other components
- Dependencies: No dependencies
- FTP\_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.
- FTP\_ITC.1.2The TSF shall permit another trusted IT product to initiate communication via the trusted/SCD importchannel.
- FTP\_ITC.1.3The TSF shall initiate communication via the trusted channel for<br/>1. Data exchange integrity according to FDP\_UCT.1/SCD.<br/>2. [None].

Application note: part 3 only [PP-SSCD-KI].

#### FTP\_ITC.1/SVD Inter-TSF trusted Channel

- Hierarchical to: No other components
- Dependencies: No dependencies
- FTP\_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT /SVD product <u>CGA</u> that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.
- FTP\_ITC.1.2 The TSF shall permit <u>another trusted IT product</u> to initiate communication via the trusted /SVD channel.
- FTP\_ITC.1.3 The TSF or the CGA shall initiate communication via the trusted channel for
  1. Data authentication with Identity of Guarantor according to FIA\_API.1 and FDP\_DAU.2/SVD,
  2. [None].

Application note: Part 4 extension [EN-419211-4] related to core PP key generation [PP-SSCD-KG].

#### FTP\_ITC.1/ VAD Inter-TSF trusted channel – TC Human Interface Device

- Hierarchical to: No other components Dependencies: No dependencies
- FTP\_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product <u>HID</u> that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.





FTP\_ITC.1.2 / The TSF shall permit the remote trusted IT product to initiate communication via the trusted VAD channel.

FTP\_ITC.1.3 /The TSF or the HIDshall initiate communication via the trusted channel forVAD1.User authentication according to FIA\_UAU.1/SIG,,

2. [None].

Application note: Part 5 extension [EN-419211-5] related to core PP key generation [PP-SSCD-KG] and Part 6 extension [EN-419211-6] related to core PP key importation [PP-SSCD-KI].

#### FTP\_ITC.1/ DTBS Inter-TSF trusted channel – Signature creation Application

- Hierarchical to: No other components
- Dependencies: No dependencies
- FTP\_ITC.1.1 The TSF shall provide a communication channel between itself and another trusted IT product <u>SCA</u> that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from modification or disclosure.
- FTP\_ITC.1.2 / The TSF shall permit <u>the remote trusted IT product</u> to initiate communication via the trusted DTBS channel.
- FTP\_ITC.1.3 / The TSF or the SCA shall initiate communication via the trusted channel forDTBS1. signature creation,...
  - 2. [None].

Application note: Part 5 extension [EN-419211-5] related to core PP key generation [PP-SSCD-KG] and Part 6 extension [EN-419211-6] related to core PP key importation [PP-SSCD-KI].

#### 7.2 SECURITY ASSURANCE REQUIREMENTS FOR THE TOE

The SAR for the evaluation of the TOE and its development and operating environment are those taken from the Evaluation Assurance Level 5 (EAL5) and augmented by taking the following components: ALC\_DVS.2, and AVA\_VAN.5.





### 7.3 SECURITY REQUIREMENTS RATIONALE

## 7.3.1 SFR and PP

Requirements	PP-SSCD-KG]	PP-SSCD-KI]	additions	EN-419211-4]	EN-419211-5]	EN-419211-6]
		ط]	ac	巴	Ш	Ш
FCS_CKM.1/SCD	Х					
FCS_CKM.1/Session			Х			
FCS_CKM.4/SCD	Х					
FCS_CKM.4/Session			Х			
FCS_COP.1/DSC	Х	Х				
FCS_COP.1/Session			Х			
FDP_ACC.1/Signature-creation	Х	Х				
FDP_ACF.1/Signature-creation	Х	Х				
FDP_ACC.1/SCD/SVD_Generation	Х					
FDP_ACF.1/SCD/SVD_Generation	Х					
FDP_ACC.1/SVD transfer SFP	Х					
FDP_ACF.1/SVD transfer SFP	Х					
FDP_ACC.1/SCD import SFP		Х				
FDP_ACF.1/SCD import SFP		Х				
FDP_ITC.1/SCD		Х				
FDP_RIP.1	Х	Х				
FDP_SDI.2/Persistent	Х	Х				
FDP_SDI.2/DTBS	Х	Х				
FDP_UIT.1/DTBS					Х	Х
FDP_DAU.2/SVD				Х		
FDP_UCT.1/SCD		Х				
FIA_AFL.1/PERSO			Х			
FIA_AFL.1/SIG	Х	Х				
FIA_API.1				Х		
FIA_UAU.1/PERSO			Х			
FIA_UAU.1/SIG	Х	Х		Х	Х	Х
FIA_UID.1/PERSO			Х			
FIA_UID.1/SIG	Х	Х				
FMT_MOF.1	Х	Х				
FMT_MSA.1/Signatory	Х	Х				
FMT_MSA.1/AdminKG	Х					
FMT_MSA.1/AdminKI		Х				
FMT_MSA.2	Х	Х				
FMT_MSA.3/Keygen	Х					
FMT_MSA.3/KeyImport		Х				
FMT_MSA.4/Keygen	Х					
FMT_MSA.4/KeyImport		Х				
FMT_MTD.1/Admin	Х	Х				
FMT_MTD.1/Signatory	Х	Х				
FMT_SMF.1	Х	Х				
FMT_SMR.1	Х	Х				
 FPT_EMS.1	Х	Х				





Requirements	[PP-SSCD-KG]	[PP-SSCD-KI]	additions	[EN-419211-4]	[EN-419211-5]	[EN-419211-6]
FPT_FLS.1	Х	Х				
FPT_PHP.1	Х	Х				
FPT_PHP.3	Х	Х				
FPT_TST.1	Х	Х				
FTP_ITC.1/SCD Import		Х				
FTP_ITC.1/SVD				Х		
FTP_ITC.1/VAD					Х	Х
FTP_ITC.1/DTBS					Х	Х

## 7.3.2 Security Functional Requirements Rationale

## 7.3.2.1 Security objectives for the TOE

Requirements	OT.Lifecycle_Security	OT.SCD_Secrecy	OT.Sig_Secure	OT.Sigy_SigF	OT.DTBS_Integrity_TOE	OT.EMSEC_Design	OT.Tamper_ID	OT.Tamper_Resistance	OT.SCD/SVD_Auth_Gen (Part 2 only)	OT.SCD_Unique (Part 2 only)	OT.SCD_SCD_Corresp (Part 2 only)	OT.SCD_Auth_Imp (Part 3 only)	OT. Pre-personalisation	OT.TOE SSCD Auth (part 4)	OT.TOE_TC_SVD_Exp (part 4)	OT.TOE_TC_VAD_Imp (part 5&6)	OT.TOE_TC_DTBS_Imp (part 5&6)
FCS_CKM.1/SCD	Х	Х								Х	Х						
FCS_CKM.1/Session	Х												Х				
FCS_CKM.4/SCD	Х	Х															
FCS_CKM.4/Session	Х												Х				
FCS_COP.1/DSC	Х		Х														
FCS_COP.1/Session	Х												Х				
FDP_ACC.1/Signature-creation	Х			Х													
FDP_ACF.1/Signature-creation	Х			Х													
FDP_ACC.1/SCD/SVD_Generation	Х								Х						Х		
FDP_ACF.1/SCD/SVD_Generation	Х								Х						Х		
FDP_ACC.1/SVD transfer	Х																
FDP_ACF.1/SVD transfer	Х																
FDP_ACC.1/SCD import	Х											Х					
FDP_ACF.1/SCD import	Х											Х					
FDP_ITC.1/SCD	Х																
FDP_RIP.1		Х															
FDP_SDI.2/Persistent		Х	Х														
FDP_SDI.2/DTBS				Х	Х												



Requirements FDP_DAU.2/SVD	OT.Lifecycle_Security	OT.SCD_Secrecy	OT.Sig_Secure	OT.Sigy_SigF	OT.DTBS_Integrity_TOE	OT.EMSEC_Design	OT.Tamper_ID	OT.Tamper_Resistance	OT.SCD/SVD_Auth_Gen (Part 2 only)	OT.SCD_Unique (Part 2 only)	OT.SCD SCD Corresp (Part 2 only)	OT.SCD_Auth_Imp (Part 3 only)	OT. Pre-personalisation	OT.TOE SSCD Auth (part 4)	× OT.TOE_TC_SVD_Exp (part 4)	OT.TOE_TC_VAD_Imp (part 5&6)	OT.TOE_TC_DTBS_Imp (part 5&6)
FDP_UCT.1/SCD	Х	Х													^		
FDP_UIT.1/ DTBS	^	~														Х	X
FIA_AFL.1/PERSO													Х			~	~
FIA_AFL.1/SIG				Х									~				
FIA_API.1				~										Х			
FIA_UAU.1/PERSO													Х	~			
FIA_UAU.1/SIG				Х					Х				~	Х			
FIA_UID.1/PERSO													Х				
FIA_UID.1/SIG				Х					Х								
FMT_MOF.1	Х			Х													
FMT_MSA.1/AdminKG	Х								Х								
FMT_MSA.1/AdminKI	Х																
FMT_MSA.1/Signatory	Х			Х													
FMT_MSA.2	Х			Х					Х								
FMT_MSA.3/Keygen	Х			Х					Х								
FMT_MSA.3/KeyImport	Х			Х													
FMT_MSA.4/Keygen	Х			Х					Х								
FMT_MSA.4/KeyImport	Х			Х													
FMT_MTD.1/Admin	Х			Х													
FMT_MTD.1/Signatory	Х			Х													
FMT_SMF.1	Х			Х													
FMT_SMR.1	Х			Х													
FPT_EMS.1		Х				Х											
FPT_FLS.1		Х															
FPT_PHP.1							Х										
FPT_PHP.3		X	V					Х									
FPT_TST.1	X	X	Х														
FTP_ITC.1/SCD Import	Х	Х													V		
FTP_ITC.1/SVD															Х	V	
FTP_ITC.1/VAD																Х	V
FTP_ITC.1/DTBS																	Х

Table 15: Objective vs. SFR rationale

**OT.Lifecycle\_Security** (*Lifecycle security*) is provided by the SFR for SCD/SVD generation FCS\_CKM.1, SCD usage FCS\_COP.1/SCD and SCD destruction FCS\_CKM.4/SCD which ensure cryptographically secure lifecycle of the SCD. The SCD/SVD generation is controlled by TSF according to FDP\_ACC.1/SCD/SVD\_Generation and FDP\_ACF.1/SCD/SVD\_Generation. The SVD transfer for certificate

Ref: D1491739





generation is controlled by TSF according to FDP\_ACC.1/SVD\_Transfer and FDP\_ACF.1/SVD\_Transfer. The SCD usage is ensured by access control FDP\_ACC.1/Signature\_Creation,

FDP\_AFC.1/Signature\_Creation which is based on the security attribute secure TSF management according to FMT\_MOF.1, FMT\_MSA.1/AdminKG, FMT\_MSA.1/AdminKI, FMT\_MSA.1/Signatory, FMT\_MSA.2, FMT\_MSA.3/KeyGen, FMT\_MSA.3/KeyImport, FMT\_MSA.4/KeyGen, FMT\_MSA.4/KeyImport, FMT\_MTD.1/Admin, FMT\_MTD.1/Signatory, FMT\_SMF.1 and FMT\_SMR.1. The test functions FPT\_TST.1

provides failure detection throughout the lifecycle.

The SCD import is controlled by TSF according to FDP\_ACC.1/SCD\_Import, FDP\_ACF.1/SCD\_Import and FDP\_ITC.1/SCD. The confidentiality of the SCD is protected during import according to FDP\_UCT.1/SCD in the trusted channel FTP\_ICT.1/SCD.

FCS\_CKM.1/Session, FCS\_CKM.4/Session and FCS\_COP.1/Session ensure the secure channel mechanisms for the initialisation, personalisation and operational usage of the TOE.

**OT.SCD\_Secrecy** (Secrecy of signature creation data) is provided by the security functions specified by the following SFR. FCS\_CKM.1 ensures the use of secure cryptographic algorithms for SCD/SVD generation. Cryptographic quality of SCD/SVD pair shall prevent disclosure of SCD by cryptographic attacks using the publicly known SVD. The security functions specified by FDP\_RIP.1 and FCS\_CKM.4 ensure that residual information on SCD is destroyed after the SCD has been use for signature creation and that destruction of SCD leaves no residual information. The security functions specified by FDP\_SDI.2/Persistent ensure that no critical data is modified which could alter the efficiency of the security functions or leak information of the SCD. FPT\_TST.1 tests the working conditions of the TOE and FPT\_FLS.1 guarantees a secure state when integrity is violated and thus assures that the specified security functions are operational. An example where compromising error conditions are countered by FPT\_FLS.1 is fault injection for differential fault analysis (DFA). SFR FPT\_EMS.1 and FPT\_PHP.3 require additional security features of the TOE to ensure the confidentiality of the SCD.

FDP\_UCT.1/SCD and FTP\_ICT.1/SCD ensures the confidentiality for SCD import.

**OT.Sig\_Secure** (*Cryptographic security of the electronic signature*) is provided by the cryptographic algorithms specified by FCS\_COP.1, which ensures the cryptographic robustness of the signature algorithms. FDP\_SDI.2/Persistent corresponds to the integrity of the SCD implemented by the TOE and FPT\_TST.1 ensures self-tests ensuring correct signature creation.

**OT.Sigy\_SigF** (*Signature creation function for the legitimate signatory only*) is provided by an SFR for identification authentication and access control. FIA\_UAU.1/SIG and FIA\_UID.1/SIG ensure that no signature creation function can be invoked before the signatory is identified and authenticated. The security functions specified by FMT\_MTD.1/Admin and FMT\_MTD.1/Signatory manage the authentication function. SFR FIA\_AFL.1/SIG provides protection against a number of attacks, such as cryptographic extraction of residual information, or brute force attacks against authentication. The security function specified by FDP\_SDI.2/DTBS ensures the integrity of stored DTBS and FDP\_RIP.1 prevents misuse of any resources containing the SCD after de-allocation (e.g. after the signature creation process). The security functions specified by FDP\_ACC.1/Signature\_Creation and FDP\_ACF.1/Signature\_Creation provide access control based on the security attributes managed according to the SFR FMT\_MTD.1/Signatory, FMT\_MSA.2, FMT\_MSA.3/KeyGen, FMT\_MSA.3/KeyImport, FMT\_MSA.4/KeyGen, and FMT\_MSA.4/KeyImport. The SFR FMT\_SMF.1 and FMT\_SMR.1 list these management functions and the roles. These ensure that the signature process is restricted to the signatory. FMT\_MOF.1 restricts the ability to enable the signature creation function to the signatory. FMT\_MSA.1/Signatory restricts the ability to modify the security attributes SCD operational to the signatory.

**OT.DTBS\_Integrity\_TOE** (*DTBS/R integrity inside the TOE*) ensures that the DTBS/R is not altered by the TOE. The integrity functions specified by FDP\_SDI.2/DTBS require that the DTBS/R has not been altered by the TOE.

**OT.EMSEC\_Design** (*Provide physical emanations security*) covers that no intelligible information is emanated. This is provided by FPT\_EMS.1.1.

**OT.Tamper\_ID** (*Tamper detection*) is provided by FPT\_PHP.1 by the means of passive detection of physical attacks.

**OT.Tamper\_Resistance** (*Tamper resistance*) is provided by FPT\_PHP.3 to resist physical attacks.





#### SSCD Part 2 only

**OT.SCD/SVD\_Auth\_Gen** (*Authorized SCD/SVD generation*) addresses that generation of a SCD/SVD pair requires proper user authentication. The TSF specified by FIA\_UID.1/SIG and FIA\_UAU.1/SIG provide user identification and user authentication prior to enabling access to authorised functions. The SFR FDP\_ACC.1/SCD/SVD\_Generation and FDP\_ACF.1/SCD/SVD\_Generation provide access control for the SCD/SVD generation. The security attributes of the authenticated user are provided by FMT\_MSA.1/Admin, FMT\_MSA.2, and FMT\_MSA.3 for static attribute initialisation. The SFR FMT\_MSA.4 defines rules for inheritance of the security attribute "SCD operational" of the SCD.

**OT.SCD\_Unique** (*Uniqueness of the signature creation data*) implements the requirement of practically unique SCD as laid down in **Annex** III, paragraph 1(a), which is provided by the cryptographic algorithms specified by FCS\_CKM.1.

**OT.SCD\_SVD\_Corresp** (*Correspondence between SVD and SCD*) addresses that the SVD corresponds to the SCD implemented by the TOE. This is provided by the algorithms specified by FCS\_CKM.1 to generate corresponding SVD/SCD pairs. The security functions specified by FDP\_SDI.2/Persistent ensure that the keys are not modified, so to retain the correspondence. Moreover, the SCD Identifier allows the environment to identify the SCD and to link it with the appropriate SVD. The management functions identified by MT\_SMF.1 and by FMT\_MSA.4 allow R.Admin to modify the default value of the security attribute SCD Identifier.

#### SSCD Part 2 and part 4

**OT.TOE\_SSCD\_Auth** (Authentication proof as SSCD) requires the TOE to provide security mechanisms to identify and to authenticate themselves as SSCD, which is directly provided by FIA\_API.1 (Authentication Proof of Identity). The SFR FIA\_UAU.1 allows (additionally to the core PP SSCD KG) establishment of the trusted channel before (human) user is authenticated.

**OT.TOE\_TC\_SVD\_Exp** (TOE trusted channel for SVD export) requires the TOE to provide a trusted channel to the CGA to protect the integrity of the SVD exported to the CGA, which is directly provided by

- The SVD transfer for certificate generation is controlled by TSF according to FDP\_ACC.1/SVD\_Transfer and FDP\_ACF.1/SVD\_Transfer.
- FDP\_DAU.2/SVD (Data Authentication with Identity of Guarantor), which requires the TOE to provide CGA with the ability to verify evidence of the validity of the SVD and the identity of the user that generated the evidence.

- FTP\_ITC.1/SVD Inter-TSF trusted channel), which requires the TOE to provide a trusted channel to the CGA.

#### SSCD Part 3 only

**OT.SCD\_Auth\_Imp** (*Authorized SCD import*) is provided by the security functions specified by the following SFR. FIA\_UID.1/SIG and FIA\_UAU.1/SIG ensure that the user is identified and authenticated before SCD can be imported. FDP\_ACC.1/SCD\_Import and FDP\_ACF.1/SCD\_Import ensure that only authorised users can import SCD.

#### SSCD part 5 and part 6 in addition with part 2 and part 3

**OT.TOE\_TC\_VAD\_Imp (Trusted channel of TOE for VAD import)** is provided by FTP\_ITC.1/VAD to provide a trusted channel to protect the VAD provided by the HID to the TOE.

**OT.TOE\_TC\_DTBS\_Imp (Trusted channel of TOE for DTBS**) is provided by FTP\_ITC.1/DTBS to provide a trusted channel to protect the DTBS provided by the SCA to the TOE and by FDP\_UIT.1/DTBS, which requires the TSF to verify the integrity of the received DTBS.

#### Extensions

**OT.Pre-personalisation** (*strong authentication in Pre-personalisation*) is provided by the security functions specified by the following SFR. FIA\_AFL.1/PERSO, FIA\_UAU.1/PERSO, FIA\_UID.1/PERSO, FCS\_CKM.1/Session, FCS\_CCM.4/Session, FCS\_COP.1/DSC and FCS\_COP.1/Session.





## 7.3.2.2 Dependency Rationale

Requirements	CC Dependencies	Satisfied Dependencies
FCS_CKM.1/SCD	(FCS_CKM.2 or FCS_COP.1)	FCS_COP.1/DSC,
	and (FCS_CKM.4)	FCS_CKM.4/SCD
FCS_CKM.1/Session	(FCS_CKM.2 or FCS_COP.1)	FCS_COP.1/Session,
	and (FCS_CKM.4)	FCS_CKM.4/Session
FCS_CKM.4/SCD	(FCS_CKM.1 or FDP_ITC.1 or	FCS_CKM.1/SCD,
<b>FOD</b> 0//// //0		FDP_ITC.1/SCD,
FCS_CKM.4/Session	(FCS_CKM.1 or FDP_ITC.1 or FDP_ITC.2)	FCS_CKM.1/Session
FCS_COP.1/DSC	(FCS_CKM.1 or FDP_ITC.1 or	FCS_CKM.1/RSA,
	FDP_ITC.2) and (FCS_CKM.4)	FDP_ITC.1/DTBS,
FCS_COD 1/Section	(FCS_CKM.1 or FDP_ITC.1 or	FCS_CKM.4/SCD, FCS_CKM.1/SCD,
FCS_COP.1/Session	FDP_ITC.2) and (FCS_CKM.4)	FCS_CKM.1/SCD, FCS_CKM.4/SCD,
		FDP_ITC.1/SCD,
FDP_ACC.1/Signature-creation	(FDP_ACF.1)	FDP_ACF.1/Signature-creation
FDP_ACF.1/Signature-creation	(FDP ACC.1) and (FMT MSA.3)	FDP_ACC.1/Signature-creation,
_ 0		FMT_MSA.3/KeyGen,
		FMT_MSA.3/KeyImport
FDP_ACC.1/SCD/SVD_Generation	(FDP_ACF.1)	FDP_ACF.1/SCD/SVD_Generation
FDP_ACF.1/SCD/SVD_Generation	(FDP_ACC.1) and (FMT_MSA.3)	FDP_ACC.1/SCD/SVD_Generation
		FMT_MSA.3/KeyGen
FDP_ACC.1/SVD transfer	(FDP_ACF.1)	FDP_ACF.1/SVD transfer
FDP_ACF.1/SVD transfer	(FDP_ACC.1) and (FMT_MSA.3)	FDP_ACC.1/SVD transfer, FMT_MSA.3/KeyGen
FDP_ACC.1/SCD import	(FDP_ACF.1)	FDP_ACF.1/SCD import
FDP_ACF.1/SCD import	(FDP_ACC.1) and (FMT_MSA.3)	FDP_ACC.1/SCD import, FMT_MSA.3/KeyImport
FDP_DAU.2/SVD	FIA_UID1.	FIA_UID.1
FDP_ITC.1/SCD	(FDP_ACC.1 or FDP_IFC.1) and (FMT_MSA.3)	FDP_ACC.1/SCD import, FMT_MSA.3/KeyImport
FDP_RIP.1	No dependencies	
FDP_SDI.2/Persistent	No dependencies	
FDP SDI.2/DTBS	No dependencies	
FDP_UIT.1/DTBS	[FDP_ACC.1 or FDP_IFC.1],	FDP_ACC.1/Signature_Creation,
	[FTP_ITC.1 or FTP_TRP.1]	FTP_ITC.1/DTBS
FDP_UCT.1/SCD	(FTP_ITC.1 or FTP_TRP.1)	FTP_ITC.1/SCD Import,
	(FDP_ACC.1 or FDP_IFC.1)	FDP_ACC.1/SCD import,
FIA_AFL.1/PERSO	(FIA_UAU.1)	FIA_UAU.1/PERSO
FIA_AFL.1/SIG	(FIA_UAU.1)	FIA_UAU.1/SIG
FIA_UAU.1/PERSO	(FIA_UID.1)	FIA_UID.1/PERSO
FIA_UAU.1/SIG	(FIA_UID.1)	FIA_UID.1/SIG
FIA_API.1	No dependencies	n/a
FIA_UID.1/PERSO	No dependencies	
FIA_UID.1/SIG	No dependencies	
FMT_MOF.1	(FMT_SMF.1) and (FMT_SMR.1)	FMT_SMR.1, FMT_SMF.1
FMT_MSA.1/AdminKG	(FDP_ACC.1 or FDP_IFC.1) and (FMT_SMF.1) and (FMT_SMR.1)	FDP_ACC.1/SCD/SVD_Generation FMT_SMR.1, FMT_SMF.1
FMT_MSA.1/AdminKI	(FDP_ACC.1 or FDP_IFC.1) and (FMT_SMF.1) and (FMT_SMR.1)	FDP_ACC.1/SCD Import, FMT_SMR.1, FMT_SMF.1





Requirements	CC Dependencies	Satisfied Dependencies
FMT_MSA.1/Signatory	(FDP_ACC.1 or FDP_IFC.1) and (FMT_SMF.1) and (FMT_SMR.1)	FDP_ACC.1/Signature-creation, FMT_SMR.1, FMT_SMF.1
FMT_MSA.2	(FDP_ACC.1 or FDP_IFC.1) and (FMT_MSA.1) and (FMT_SMR.1)	FDP_ACC.1/SCD/SVD_Generation FDP_ACC.1/Signature-creation, FMT_MSA.1/AdminKG, FMT_MSA.1/AdminKI FMT_MSA.1/Signatory, FMT_SMR.1
FMT_MSA.3/KeyGen	(FMT_MSA.1) and (FMT_SMR.1)	FMT_MSA.1/AdminKG, FMT_MSA.1/Signatory, FMT_SMR.1
FMT_MSA.3/KeyImport	(FMT_MSA.1) and (FMT_SMR.1)	FMT_MSA.1/AdminKI, FMT_MSA.1/Signatory, FMT_SMR.1
FMT_MSA.4/KeyGen	(FDP_ACC.1 or FDP_IFC.1)	FDP_ACC.1/SCD/SVD_Generation FDP_ACC.1/Signature-creation
FMT_MSA.4/KeyImport	(FDP_ACC.1 or FDP_IFC.1)	FDP_ACC.1/SCD Import, FDP_ACC.1/Signature-creation
FMT_MTD.1/Admin	(FMT_SMF.1) and (FMT_SMR.1)	FMT_SMR.1, FMT_SMF.1
FMT_MTD.1/Signatory	(FMT_SMF.1) and (FMT_SMR.1)	FMT_SMR.1, FMT_SMF.1
FMT_SMF.1	No dependencies	
FMT_SMR.1	(FIA_UID.1)	FIA_UID.1/SIG
FPT_EMS.1	No dependencies	
FPT_FLS.1	No dependencies	
FPT_PHP.1	No dependencies	
FPT_PHP.3	No dependencies	
FPT_TST.1	No dependencies	
FTP_ITC.1/SCD Import	No dependencies	
FTP_ITC.1/SVD	No dependencies	n/a
FTP_ITC.1/VAD	No dependencies	n/a
FTP_ITC.1/DTBS	No dependencies	n/a

Table 16: Dependency rationale

### 7.3.3 Security Assurance Requirements Rationale

EAL5 was chosen because it provides a high level of independently assured security in a planned development. It requires a rigorous development approach without incurring unreasonable costs attributable to specialist security engineering techniques.

The selection of the component ALC\_DVS.2 provides a higher assurance of the security of the SSCD's development and manufacturing especially for the secure handling of the SSCD's material.

The selection of the component AVA\_VAN.5 provides a higher assurance of the security by vulnerability analysis to assess the resistance to penetration attacks performed by an attacker possessing a high attack potential.



## 8. <u>TOE SUMMARY SPECIFICATION</u>

### 8.1 TOE SECURITY FUNCTIONS

TOE Security Functions are provided by the IAS application with its OS, and by the chip. The security functions provided by the platform are described in [ST-PLTF].

## 8.1.1 SF provided by IAS Application

This section presents the security functions provided by the IAS application.

Identification	Name
SF.AUTHENTICATION	Authentication management
SF.CRYPTO	Cryptography management
SF.INTEGRITY	Integrity monitoring
SF.MANAGEMENT	Operation management and access control
SF.SECURE_MESSAGING	Secure messaging management
SF.CSM	Card Security Management

Table 17: TOE security functions list

SF.AUTHENTICATION provides the authentication management on the TOE. It encompasses:

- Signatory authentication failure as defined in FIA\_AFL.1/SIG,
- Timing of signatory identification and authentication as defined in FIA\_UID.1/SIG and FIA\_UAU.1/SIG,
- Authentication of proof of identity & identity guarantor FIA\_API.1 & FDP\_DAU.2/SVD
- Pre-personaliser authentication failure as defined in **FIA\_AFL.1/PERSO**,
- Timing of pre-personaliser identification and authentication as defined in FIA\_UID.1/PERSO and FIA\_UAU.1/PERSO.

SF.CRYPTO provides the crypto management on the TOE. It encompasses:

- The generation of SCD/SVD and session keys as defined in FCS\_CKM.1/SCD and FCS\_CKM.1/Session,
- The destruction of SCD and session keys as defined in FCS\_CKM.4/SCD and FCS\_CKM.4/Session,
- The usage of SCD and session keys as defined in FCS\_COP.1/DSC and FCS\_COP.1/Session

SF.INTEGRITY provides the integrity monitoring on the TOE. It encompasses:

• The integrity of sensitive data as defined in FDP\_SDI.2/Persistent and FDP\_SDI.2/DTBS, and also FDP\_UIT.1/DTBS

SF.MANAGEMENT provides operation management and access control. It encompasses:

- Access management as defined in FDP\_ACC.1 and FDP\_ACF.1 SFR,
- Data input and output as defined in **FDP\_ITC.1/SCD**,
- Management of functions as defined in FMT\_MOF.1 and FMT\_SMF.1,
- Management of security attributes FMT\_MSA.1/AdminKG, FMT\_MSA.1/AdminKI, FMT\_MSA.1/Signatory, FMT\_MSA.2, FMT\_MSA.3/KeyImport, FMT\_MSA.3/KeyGen, FMT\_MSA.4/KeyImport, FMT\_MSA.4/KeyGen,
- Management of TSF data as defined in FMT\_MTD.1/Admin and FMT\_MTD.1/Signatory,
- Management of roles as defined in **FMT\_SMR.1**,

SF.SECURE\_MESSAGING provides secure messaging for the TOE. It encompasses:

• Data exchange integrity and confidentiality as defined in FDP\_UCT.1/SCD,



• Secure channel and secure path as defined in FTP\_ITC.1/SCD Import, in FTP\_ITC.1/SVD, in FTP\_ITC.1/VAD, in FTP\_ITC.1/DTBS,

SF.CSM provides cards security protection. It encompasses:

- Protection against physical attacks as defined in FPT\_EMS.1, FPT\_FLS.1, FPT\_PHP.1, and FPT\_PHP.3,
- Testing of the card as defined in FPT\_TST,
- Secure unavailability of sensitive data as defined in FDP\_RIP.

## 8.1.2 TSFs provided by the platform

The evaluation is a composite evaluation and uses the results of the Platform CC.

SF	Description
SF_FW	Firewall
SF_API	Application Programming Interface
SF.CSM	Card Security Management
SF.AID	AID Management
SF.INST	Installer
SF.ADEL	Applet Deletion
SF.ODEL	Object Deletion
SF.CAR	Secure Carrier
SF.SCP	Smart Card Platform
SF.CMG	Card Manager
SF.APIS	Specific API
SF.RND	RNG

Table 18: Security Functions provided by the MultiApp V4.2 Platform

These SF are described in [ST-PLTF].

## END OF DOCUMENT

